

M7425 SERIES

DC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- **MINIATURE**
- **HIGH DENSITY**
- **SINGLE OUTPUT**
- **DC/DC CONVERTER**
- **UP TO 800W**

M7425 SERIES DC/DC POWER SUPPLY

Applications

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial

Special Features

- Miniature size
- High efficiency
- Wide input range
- Input-to-output isolation
- Remote sense compensation
- Remote inhibit (ON/OFF)
- Fixed switching freq. (250 kHz)
- External sync. capability
- EMI filters included
- Indefinite short circuit protection with auto-recovery
- Over-voltage shutdown with auto-recovery
- Over temperature shutdown with auto-recovery

Electrical Specifications

DC Input

Voltage range: 18 to 48V_{DC}
Transient protection:
No damage due to surges IAW
MIL-STD-1275A (100V for
50ms)
MIL-STD-704A (80V for 0.1s)

DC Output

Voltage range: 3.3V to 50V_{DC}
Current range: up to 50A
Power range: 800W
Peak power (short period): 1kW

Isolation

Input to Output: 200V_{DC}
Input to Case: 200V_{DC}
Output to Case: 100V_{DC}

Output Voltage Regulation

Up to ±1% (no load to full load,
–55°C to +85°C and over input
voltage range).

Efficiency

Typical 85% (28V_{DC} output,
nominal input voltage, full load,
room temperature)

EMC

Designed to meet MIL-STD-461F*
CE101, CE102, CS101, CS114,
CS115, CS116, RE101, RE102,
RS101, RS103

Ripple and Noise

Less than 50mV_{p-p}, typical (max.
1%) without external
capacitance. When connected
to system capacitance ripple
drops significantly.

Transient Over- and Undershoot

Output resistance at load change
of 50%-100% is 30-120mΩ
(depending on output voltage).
Output back to steady stated
within 300-500μs.

Turn on Transient

No Voltage over shoot during
power on.

* EMC compliance achieved when tested with 5 μH LISNs, shielded harness and static resistive load.

M7425 SERIES DC/DC POWER SUPPLY

Protections *

Input

- **Under Voltage Lock Out**
Unit shuts down when input voltage falls below 16.5V_{DC} ±1V_{DC}
- **Over Voltage Lock Out**
Unit shuts down when input voltage rises above 52V_{DC} ±2V_{DC}

Output

- **Active Over-Voltage Protection**
The converter will clamp the output if it exceeds 110% ±5% of the nominal voltage. The converter restarts after a preset period of time if output voltage decreases back to normal value.
- **Passive Over-Voltage Protection**
Load protected by a transorb rated 120% ±10% above nominal output voltage.
- **Overload Protection (Hiccup)**
Continuous protection (20% ±10% above maximum current) for unlimited time.

General

- **Over Temperature Protection**
The converter shuts down if baseplate temperature exceeds +105°C ±5°C. The converter automatically recovers when its baseplate temperature falls back below +95°C ±5°C.

Environmental

Design to Meet MIL-STD-810F

Temperature

Operating: -55°C to +85°C (base plate)
Storage: -55°C to +125°C

Altitude

Method 500.4
Procedure I & II,
Up to 70,000 ft. operational

Salt Fog

Method 509-4

Humidity

Method 507.4
Procedure I
Up to 95% RH

Vibration (random)

Method 514.5
Category 4 - General minimum integrity exposure
IAW Figure 514.5C-17
1 hour per axis.

Shock

Method 516.5
Procedure I
30g, 11ms terminal peak saw-tooth.

Reliability

150,000 hours, calculated per MIL-STD-217F Notice 2 at +85°C baseplate, Ground Fixed environment.

Environmental Stress Screening (ESS)

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

* Thresholds and protections can be modified / removed – please consult factory.

M7425 SERIES DC/DC POWER SUPPLY

Pin Assignment

Input connector - J1

Connector type: M24308/24-39F or eq.

Mates with: M24308/2-3F or eq.

Pin No.	Function	P
1	INPUT	+
2	INPUT	+
3	INPUT	+
4	INPUT	+
5	INPUT	+
6	N.C.	
7	INPUT RTN	–
8	INPUT RTN	–
9	INPUT RTN	–

Pin No.	Function	P
10	INPUT RTN	–
11	CHASSIS	
12	INHIBIT	+
13	SIGNAL RTN	–
14	INPUT	+
15	INPUT	+
16	INPUT	+
17	INPUT	+
18	N.C.	

Pin No.	Function	P
19	INPUT RTN	–
20	INPUT RTN	–
21	INPUT RTN	–
22	INPUT RTN	–
23	INPUT RTN	–
24	N.C.	
25	SYNC	+

Output connector – J2

Connector type: M24308/23-39F or eq.

Mates with: M24308/4-3F or eq.

Pin No.	Function	P
1	SENSE	+
2	OUTPUT	+
3	OUTPUT	+
4	OUTPUT	+
5	OUTPUT	+
6	OUTPUT	+
7	N.C.	
8	OUTPUT RTN	–
9	OUTPUT RTN	–

Pin No.	Function	P
10	OUTPUT RTN	–
11	OUTPUT RTN	–
12	OUTPUT RTN	–
13	SENSE RTN	–
14	OUTPUT	+
15	OUTPUT	+
16	OUTPUT	+
17	OUTPUT	+
18	OUTPUT	+

Pin No.	Function	P
19	N.C.	
20	N.C.	
21	OUTPUT RTN	–
22	OUTPUT RTN	–
23	OUTPUT RTN	–
24	OUTPUT RTN	–
25	OUTPUT RTN	–

NOTE: All pins with identical function/designation should be connected together for best performance.

Functions and Signals

INHIBIT

Description: Inhibits output.

Use: Apply short circuit or TTL "LOW" to inhibit selected output.

Leave open or apply TTL "HIGH" to enable all outputs.

Referenced to: SIGNAL RTN

SYNC

Description: Synchronizes internal switching frequency to system clock. Use: Apply TTL level, 250 kHz $\pm$ 10 kHz, 50% duty-cycle clock.

Leave open if unused. In this case, the switching frequency will be set by the internal clock.

Referenced to: SIGNAL RTN

SIGNAL RTN

Description: Signals return reference.

Referenced to: Connected by a 100 Ω resistor to INPUT RTN

SENSE

Description: Used to achieve accurate voltage regulation at load terminals, to compensate for voltage drop across the leads connecting the converter to the load, between 2% to 10%.


Use: Connect SENSE line directly to the load's positive terminal, and SENSE RTN directly to the load's negative terminal.

If not used, connect SENSE to OUTPUT and SENSE RTN to OUTPUT RTN. Do not leave open!

Referenced to: SENSE RTN


M7425 SERIES DC/DC POWER SUPPLY

Typical Connection

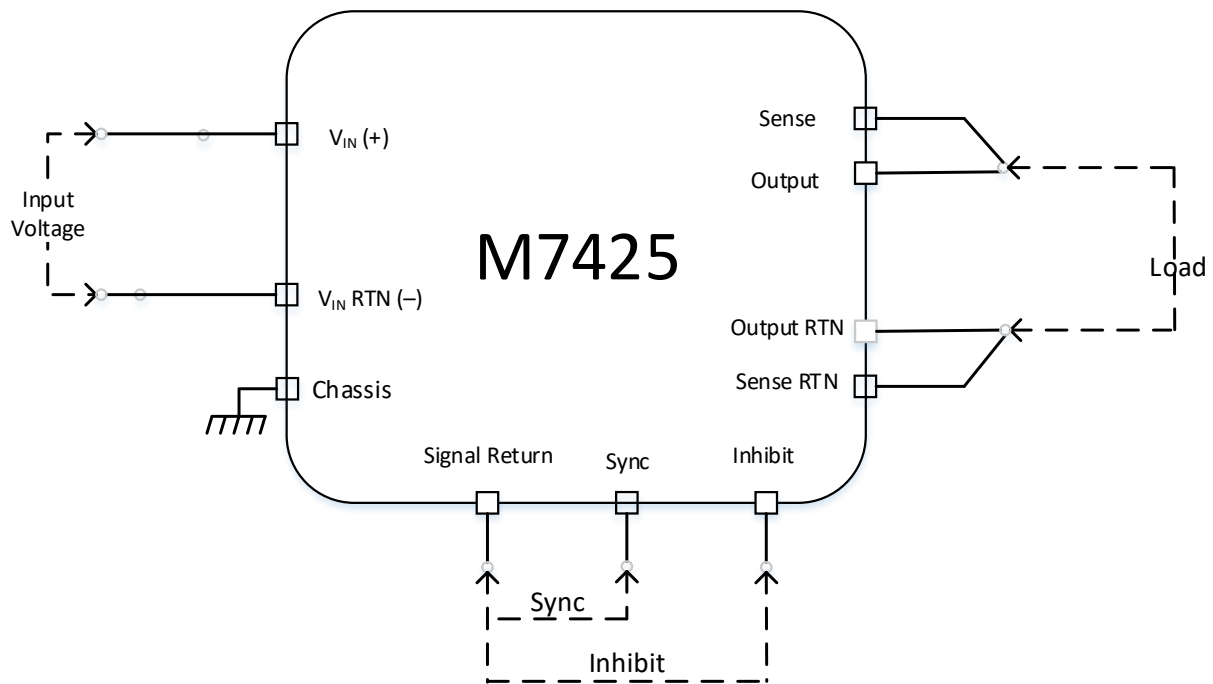


M7425 SERIES DC/DC POWER SUPPLY

Redundant Connection Diagram

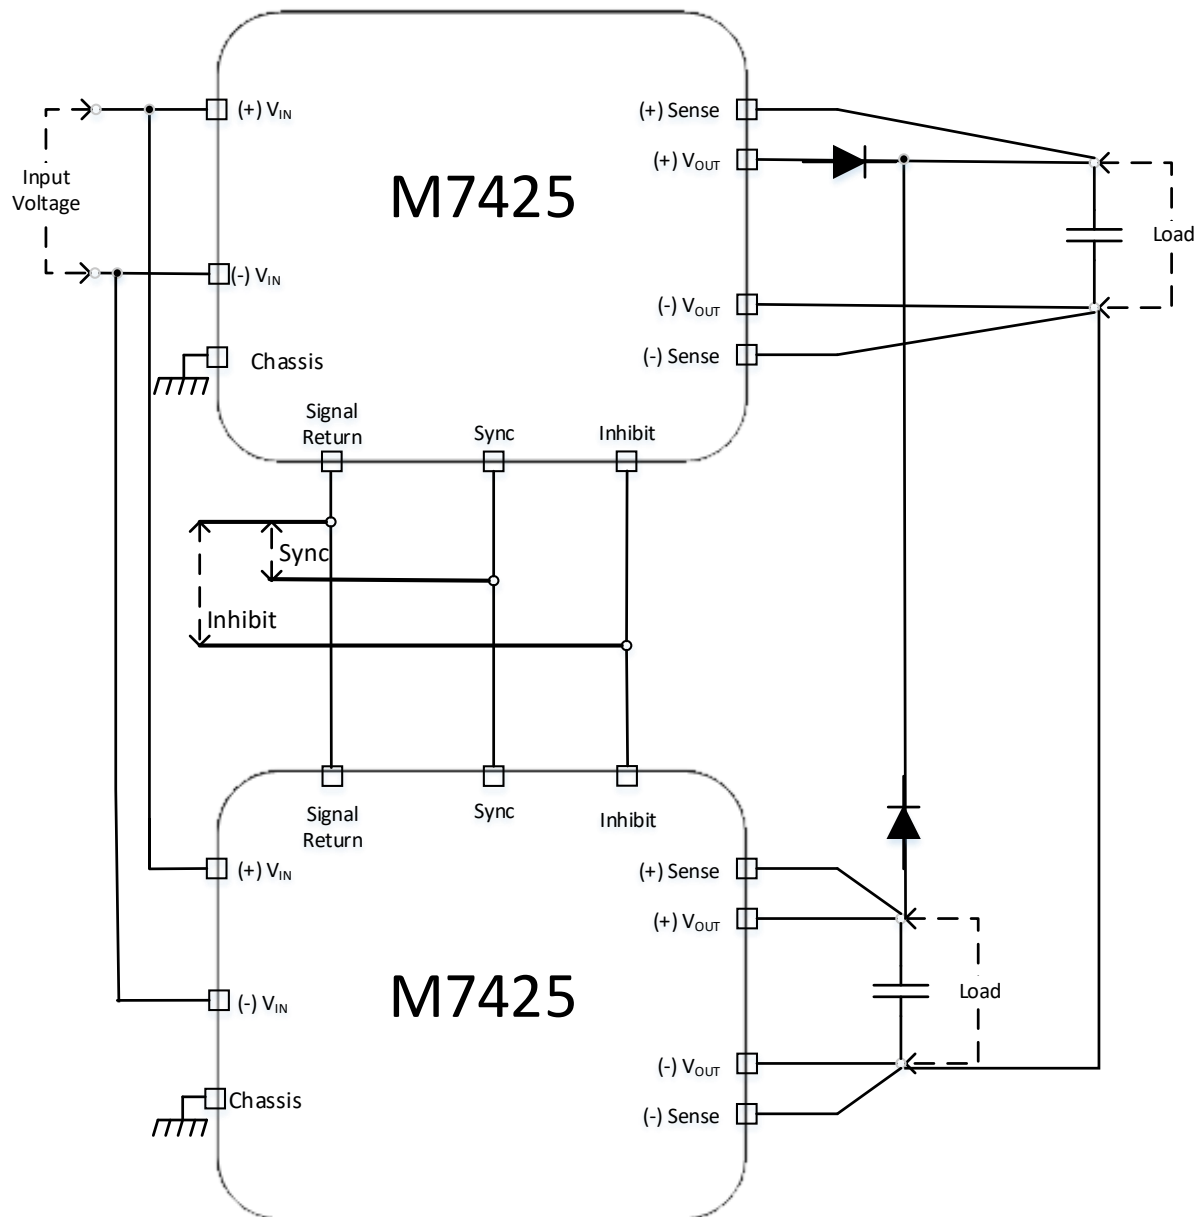

M7425 SERIES DC/DC POWER SUPPLY


Outline Drawing

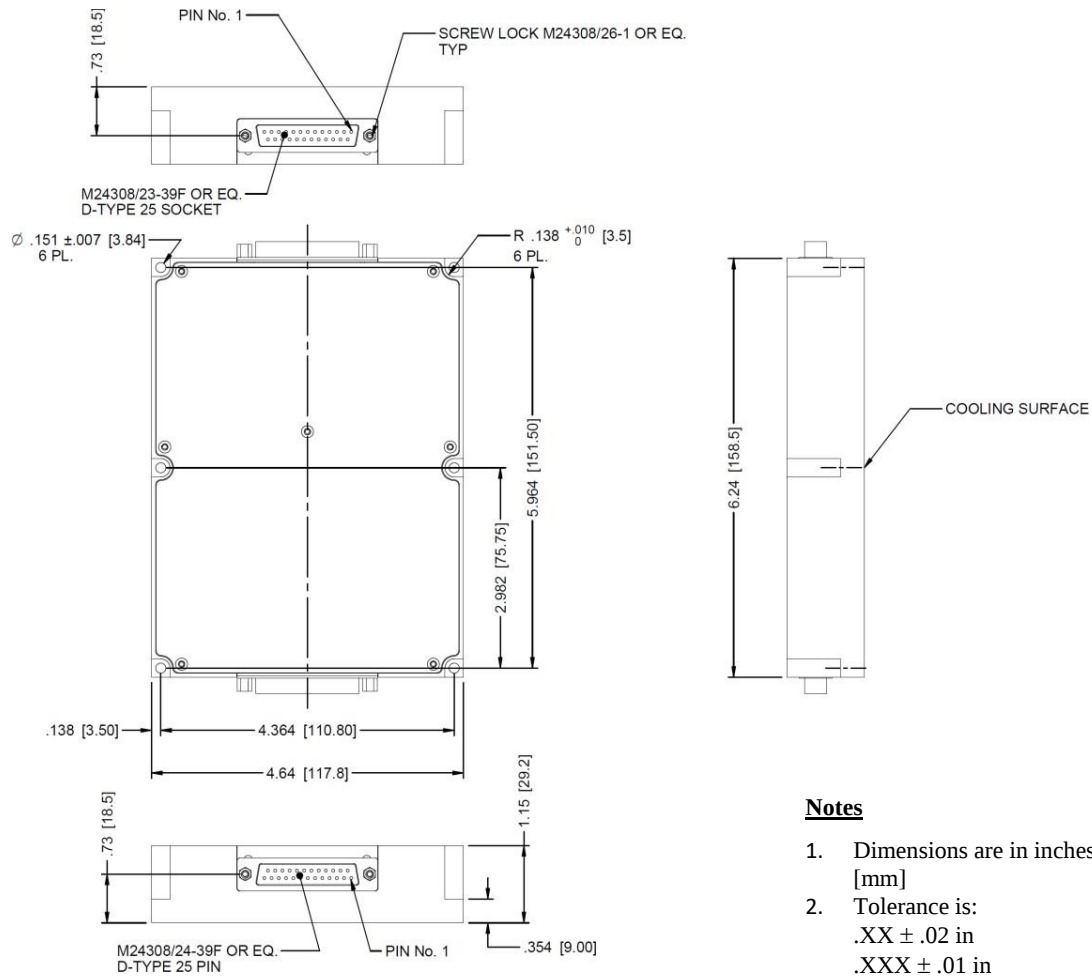

Notes

1. Dimensions are in inches [mm]
2. Tolerance is:
.XX $\pm .02$ in
.XXX $\pm .01$ in
3. Weight: Approx. 30 oz [900 g]

Heat Dissipation Surface

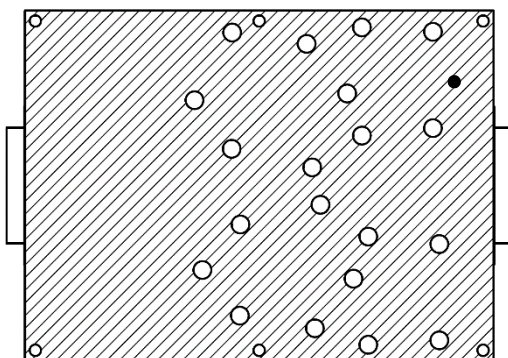

Dissipation Area:
27.96 in²
[18,040 mm²]

Note: Specifications are subject to change without prior notice by the manufacturer