**bel****AEROSPACE
& DEFENSE**Networking
Products

MILTECH™ 304

Compact, Portable Military Fast Ethernet Switch

Driven by rapid advancement and lower costs, Ethernet is becoming the standard for IP-based components in a wide range of military and commercial land, sea, and air applications.

The MILTECH 304's ultra-compact, IP68 rugged construction, and Fast Ethernet make it the ideal switching solution for command post, man packable and UAV systems. Its four 10/100Mbps ports are plug-n-play with all Ethernet equipment and provide network connectivity for most portable Ethernet devices, including:



- Voice and video communication systems
- IP-based sensors
- Battlefield communication C4ISR
- Combat vehicles, avionics, shipboard systems
- Rugged computers
- Navigation devices
- Helmet-mounted heads-up displays

With the best combination of size, weight, power, and cost (SWaP-C) in the industry, the MILTECH 304 reduces load on the soldier, providing more space for equipment that increases effectiveness and survivability. The MILTECH 304 is optimized for low-power operation and can be powered from common system power sources, including USB.

The MILTECH's mechanical packaging enhancements, including ruggedized SCE2 circular connectors, is designed for MIL-STD-810F airborne and ground environmental compliance and high reliability. Leveraging best-in-class switching technology from Techaya, the MILTECH 304 serves as a robust commercial off-the-shelf (COTS) solution for rugged LAN connectivity.

**bel****AEROSPACE
& DEFENSE**

Ask us about our complete line of power and networking products.
sales-aerodef@belf.com • www.bel-aerospace-defense.com






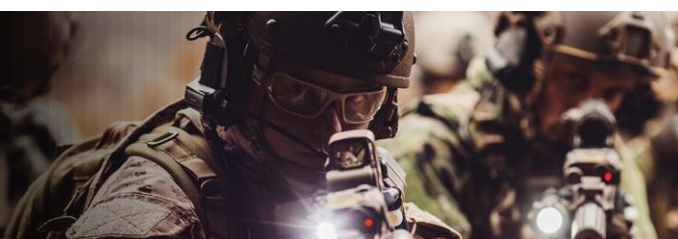
**bel****AEROSPACE
& DEFENSE**Networking
Products

SPECIFICATIONS

ETHERNET PORTS:	4 x 10/100BaseT ports
NETWORKING:	- Full wire-speed forwarding rate - Store-and-forward mechanism - Auto MDI-II, MDI-X - Auto-Negotiation Protocol - Address Look-Up
POWER:	- Voltage Input*: 2023 modification and later: 5VDC to 28VDC - Pre-2023 units: 5VDC±5% - Supports USB sourcing - Power Consumption: 2W Typical - Chassis grounding * Note: In case the unit's status is unknown, it is recommended to use 5VDC. For confirmation, please contact customer service.
CONNECTORS:	- Power Connector: SCE2-B-76A06-07SN-001 - LAN Connector: SCE2-B-76A06-07SN-001 - LED Indication Per Port (Link/Activity)
CHASSIS:	- Low profile rugged aluminum extrusion - Conductively cooled w/custom internal heat-sinks - Ingress protection against sand, dust and moisture
PERFORMANCE:	128K Byte of SRAM for Frame Buffering 2.0Gbps High-Performance Memory Bandwidth - Wire-Speed Reception and Transmission - Integrated Address Look-Up Engine - Automatic Address Learning
STANDARDS COMPLIANCE:	- IEEE 802.3 10 Mbps 10BASE-T (Ethernet) - IEEE 802.3u 100BASE-TX 100 Mbps (Fast Ethernet) - IEEE 802.3x Flow Control
STANDARDS:	Designed to meet MIL-STD-461, MIL-STD-810, IP68
PHYSICAL:	- Dimensions: 82.2mm (L) x 64.1mm (W) x 26mm (H), not including connector Dust Caps - Dimensions: 3.2"(L) x 2.5"(W) x 1.0(H), Not including connector Dust Caps - Weight: 140g, not including dust caps
INSTALLATION:	- Portable, 4 screws for mounting to any flat surface 4 x 4-40 UNC screws with locking helicoils
COOLING:	No Moving Parts. Passive Cooling
OPERATING TEMP:	-40°C to +85°C (-40°F to +185°F) - Cold Start-Up
STORAGE TEMP:	-40°C to +85°C (-40°F to +185°F)

**bel****AEROSPACE
& DEFENSE**

Ask us about our complete line of power and networking products.
sales-aerodef@belf.com • www.bel-aerospace-defense.com

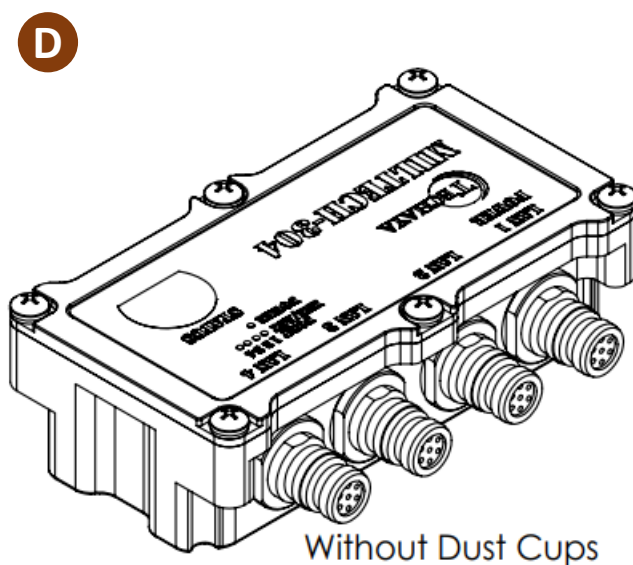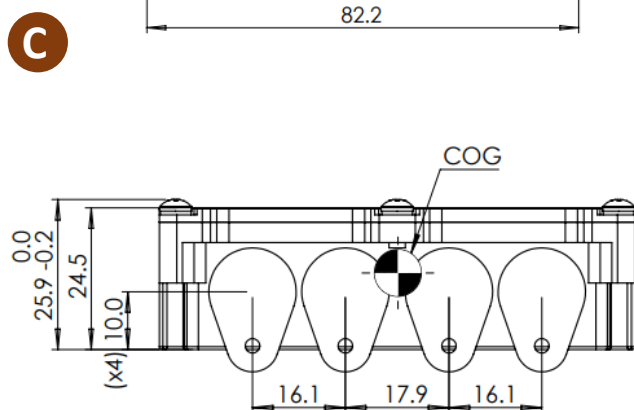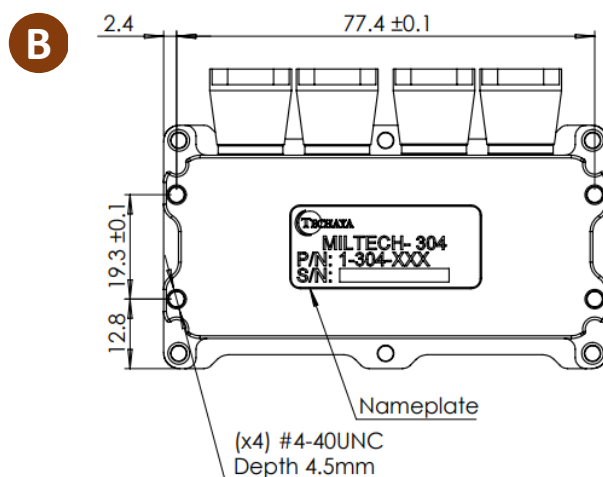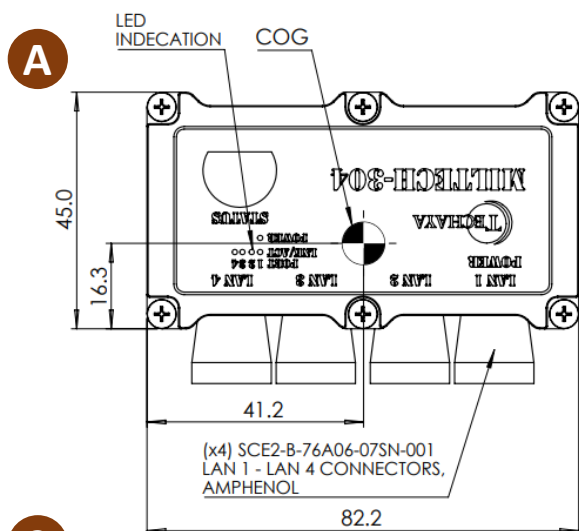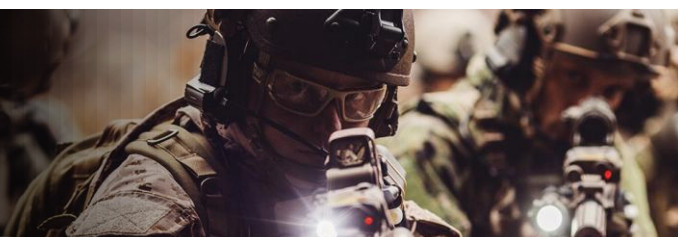

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-304-000	MILTECH 304, 4 x 10/100BaseT MIL-STD rugged switch
2-CBL308LN3M	LAN Harness for MILTECH308/304 MIL-SCE circular connector to RJ45 , 3-meter length
2-CBL918TSNLAN	Power + LAN Harness for MILTECH308/304 MIL-SCE circular connector to RJ45 and 2 wire , 3-meter length

