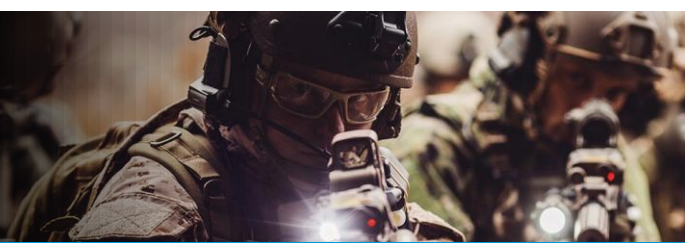
**bel****AEROSPACE
& DEFENSE**Networking
Products

MILTECH 610

Compact, Portable IP67 8-Port Military Fast Ethernet Switch

Ethernet is becoming the standard for IP-based components in a wide range of military and commercial land, sea, and air applications. When building communications where data prioritization is not a concern and the amount of traffic is low, unmanaged, Fast Ethernet switches can be an ideal solution.

The MILTECH 610's small size, IP67 rugged construction, and Fast Ethernet make it the ideal switching solution for command post, ground mobile and airborne applications. Its eight 10/100Mbps ports are plug-n-play compatible with all Ethernet equipment, providing network connectivity for most portable Ethernet devices, including:

- Rugged computers
- Navigation devices
- Voice and video communication systems
- IP-based sensors
- Battlefield communication C4ISR
- Combat vehicles, avionic and shipboard systems

The MILTECH 610 a robust unmanaged switch designed for harsh environments that require LAN connectivity between IP-enabled computers and peripherals.

The MILTECH 610 operates on readily available 24VDC power and supports MIL-STD1275 so that it may be powered directly from any available battery in the field. The 610 is equipped with 8 LED link status indicator lights.

The MILTECH's mechanical packaging enhancements, including ruggedized D38999 circular connectors, is designed for MIL-STD-810F airborne and ground environmental compliance and high reliability. Leveraging best-in-class switching technology, the MILTECH 610 serves as a robust commercial off-the-shelf (COTS) solution for rugged LAN connectivity.





SPECIFICATIONS

ETHERNET PORTS:	• 8 x switched 10/100Base-T (Fast Ethernet) ports
NETWORKING:	• Full wire-speed forwarding rate • Store-and-forward mechanism • Auto MDI-II, MDI-X • Auto-Negotiation Protocol • Address Look-Up
CONNECTORS:	• Power Connector: D38999/24WA98PA • LAN Connector: D38999/24WA35SN • Indication Per Port (Link/Activity)
CHASSIS:	• Machined rugged aluminum • Conductively cooled w/custom internal heat-sinks • Ingress protection against sand, dust and moisture • Anodize Coating, MIL-A-8625, Type II, Class 2

**bel****AEROSPACE
& DEFENSE**

Ask us about our complete line of power and networking products.




sales-aerodef@belf.com • www.bel-aerospace-defense.com

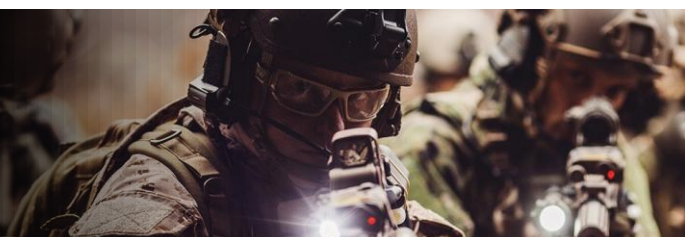

SPECIFICATIONS

PERFORMANCE	• IEEE 802.3 10 Mbps 10BASE-T (Ethernet) • IEEE 802.3u 100BASE-TX 100 Mbps (Fast Ethernet) • IEEE 802.3x Flow Control
POWER:	• Voltage Input: 24Vdc Nominal (18-32V) • Power Consumption: 2.8W Typical • Chassis grounding
EMC/ENVIRONMENTAL:	Designed to Meet: • MIL-STD-461E • MIL-STD-810F • MIL-STD-1275 • MIL-STD-704A • IP67
PHYSICAL:	• Dimensions: 269mm (L) x 133mm (W) x 71.7mm (H), including connectors • Dimensions: 10.6" (L) x 5.2" (W) x 2.8" (H), including connectors • Weight: 1.5kg
INSTALLATION:	• Four 4 x 5.2 mounting holes on bottom for mounting to any flat surface • Carrying handles - Optional
COOLING:	• No Moving Parts. Passive Cooling
OPERATING TEMP:	• -40°C to +85°C (-40°F to +185°F) – Cold Start-Up
STORAGE TEMP:	• -40°C to +85°C (-40°F to +185°F)



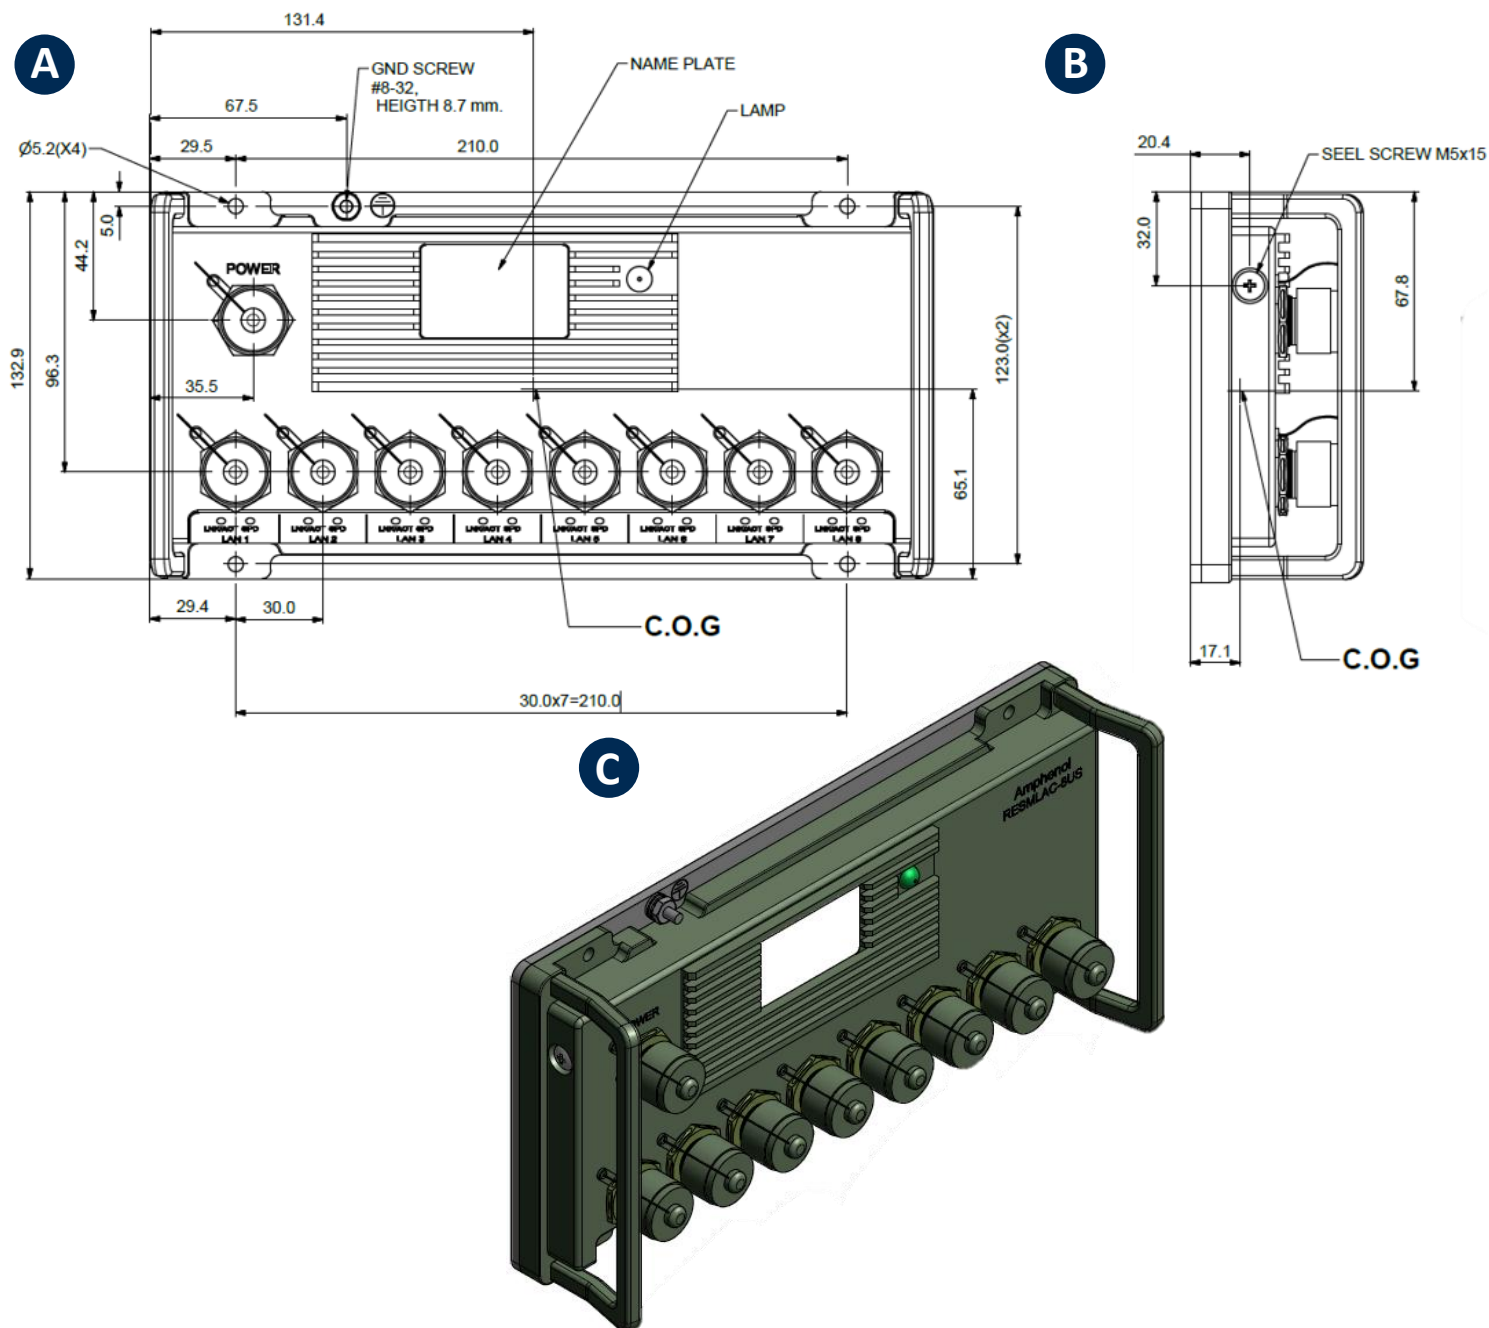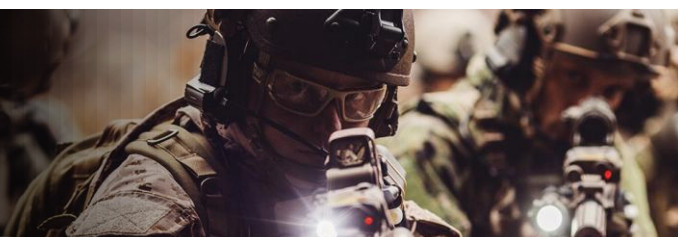

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-610-000	MILTECH610, military Rugged, 8 x 10/100TX, Switch
2-CBL708PWLN	Power cable MILTECH-610, MIL-D38999 Connector, 3 meters length
2-CBL708LN3M	LAN cable for MILTECH 610, MIL-D38999 to RJ45 connector, 3 meters length
800-H-0610-000	Carrying Handels Kit for MILTECH610

