**bel****AEROSPACE
& DEFENSE**Networking
Products

MILTECH™ 708

Compact, Portable IP67 Military 8-Port Fast Ethernet Switch

Driven by rapid advancement and lower costs, Ethernet is becoming the standard for IP-based components in a wide range of military and commercial land, sea, and air applications. When building communications where data prioritization is not a concern and the amount of traffic is low, unmanaged, Fast Ethernet switches can be an ideal solution.



The MILTECH708's small size, IP67 rugged construction, and Fast Ethernet make it the ideal switching solution for command post, ground mobile, and airborne applications. Its eight 10/100Mbps ports are plug-n-play compatible with all Ethernet equipment, providing network connectivity for most portable Ethernet devices, including:

- Rugged computers
- Navigation devices
- Voice and video communication systems
- IP-based sensors
- Battlefield communication C4ISR
- Combat vehicles, avionics, shipboard systems

The MILTECH 708 operates on readily available 24VDC power and supports MIL-STD-1275 so that it may be powered directly from any available battery in the field. The MILTECH's mechanical packaging enhancements, including ruggedized D38999 circular connectors, is designed for MIL-STD-810F airborne and ground environmental compliance and high reliability. Leveraging best-in-class switching technology, the MILTECH708 serves as a robust commercial off-the-shelf (COTS) solution for rugged LAN connectivity.

**bel****AEROSPACE
& DEFENSE**

Ask us about our complete line of power and networking products.
sales-aerodef@belf.com • www.bel-aerospace-defense.com

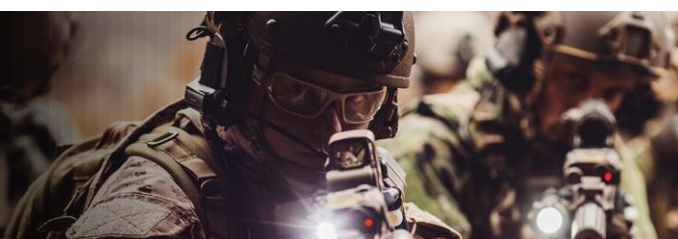
**bel****AEROSPACE
& DEFENSE**Networking
Products

SPECIFICATIONS

ETHERNET PORTS:	• 8 x 10/100BaseT ports
NETWORKING:	• Full wire-speed forwarding rate • Store-and-forward mechanism • Auto MDI-II, MDI-X • Auto-Negotiation Protocol • Address Look-Up
CONNECTORS:	• Power Connector: D38999/24WA98PA • LAN Connector: D38999/24WA35SN • No led Indication Per Port (Link/Activity) • Power Indication only
CHASSIS:	• Low profile rugged aluminum extrusion • Conductively cooled w/custom internal heat-sinks • Ingress protection against sand, dust and moisture
PERFORMANCE:	• 128K Byte of SRAM for Frame Buffering • 2.0Gbps High-Performance Memory Bandwidth • Wire-Speed Reception and Transmission • Integrated Address Look-Up Engine • Automatic Address Learning
STANDARDS COMPLIANCE:	• IEEE 802.3 10 Mbps 10BASE-T (Ethernet) • IEEE 802.3u 100BASE-TX 100 Mbps (Fast Ethernet) • IEEE 802.3x Flow Control
POWER:	• Voltage Input: 24Vdc Nominal (18-32V) • Power Consumption: 2.8W Typical • Chassis grounding
EMC/ENVIRONMENTAL:	Designed to Meet: • MIL-STD-461E • MIL-STD-810F • MIL-STD-1275 • MIL-STD-704 • IP67
PHYSICAL:	• Dimensions: 269mm (L) x 133mm(W) x 71.7mm(H), including connectors • Dimensions: 10.6"(L) x 5.2"(W) x 2.8"(H), including connectors Weight: 1.5kg • Weight:1.5kg
INSTALLATION:	• Four 4x5.2 mounting holes on the bottom for mounting to any flat surface
COOLING:	• No Moving Parts. Passive Cooling
OPERATING TEMP:	• -40°C to +85°C (-40 F to +185 F) - Cold Start-Up
STORAGE TEMP:	• -40°C to +85°C (-40°F to +185°F)


**bel****AEROSPACE
& DEFENSE**

Ask us about our complete line of power and networking products.
sales-aerodef@belf.com • www.bel-aerospace-defense.com




bel AEROSPACE
& DEFENSE


Networking
Products

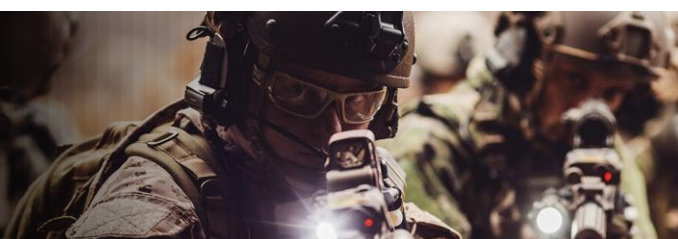


A

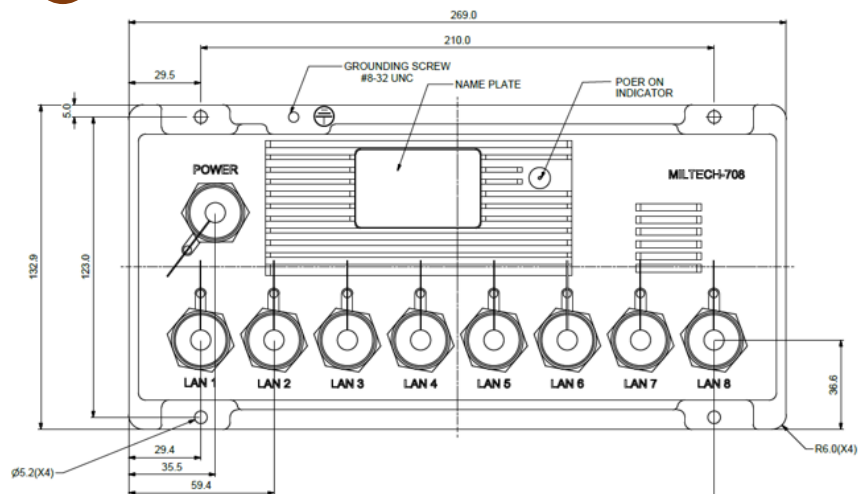

B

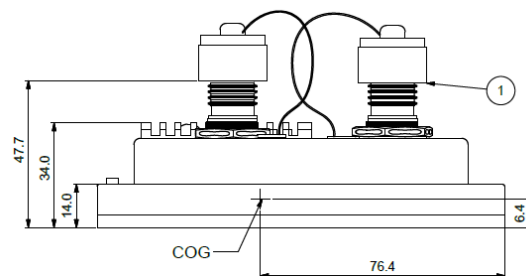

C

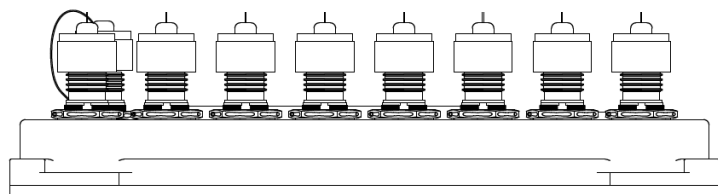

D



ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-708-000	MILTECH708, military Rugged, 8 x 10/100TX, Switch
2-CBL708PWLN	Power cable MILTECH708, MIL-D38999 Connector, 3m length
2-CBL708LN3M	LAN cable for MILTECH708, MIL-D38999 to RJ45 connector, 3m length



bel AEROSPACE
& DEFENSE

Ask us about our complete line of power and networking products.
sales-aerodef@belf.com • www.bel-aerospace-defense.com