**bel****AEROSPACE
& DEFENSE**Networking
Products

MILTECH™ 9126


Military Grade Embedded Ethernet Switch - 24 x 10/100/1000Base-T Ports
+ 2 x Gigabit Fiber Ports

The MILTECH 9126 is specifically designed for complex traffic applications featuring IEEE-1588 capabilities suitable for rugged military mobile tactical platforms, which require network-centric interfaces.



With 24 triple-speed (10/100/1000Mbps) ports + 2 1000Base-X/Interfaces SGMII, MILTECH 9126 features both L2/ L3 network switching and static routing capabilities, including virtual LANS (VLANS), traffic prioritization/ QoS, IPv4/IPv6 support, and bandwidth aggregation. It supports all the latest networking protocols for redundancy, security, multicast, and management.

With the industry's smallest footprint, the MILTECH 9126 measures only 130x87 mm to offer performance and a combination of size, weight, and power (SWaP) in the industry, saving valuable real estate for devices that make mobile platforms highly effective.

Conformally coated and with board-to-board connectors, it can easily be integrated as a module-based network building block in any military-grade communications platform. The MILTECH 9126 board level communication solution will withstand working temperatures of -40°C to +85°C and will comply with MIL STD-810 & MILSTD461 (when incorporated in a suitable enclosure).

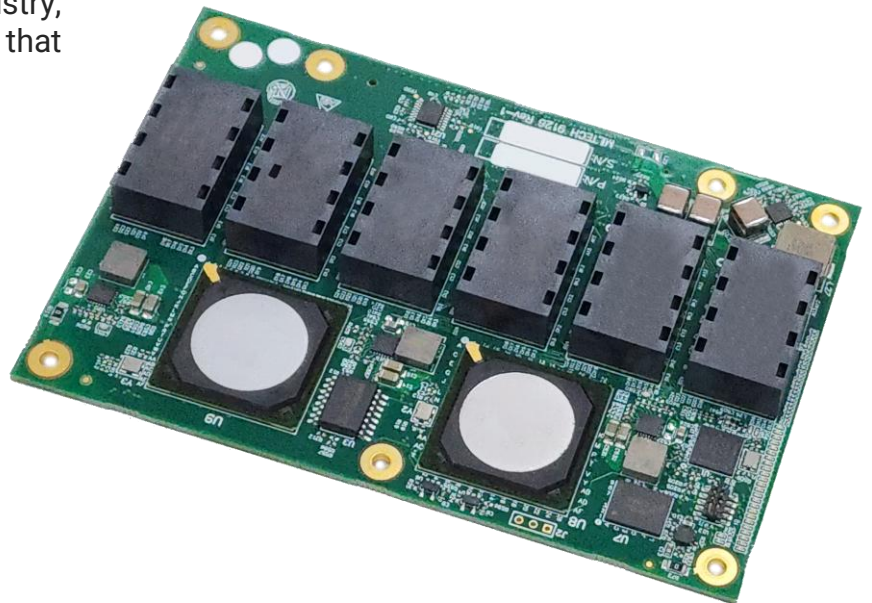**bel****AEROSPACE
& DEFENSE**

Ask us about our complete line of power and networking products.
sales-aerodef@belf.com • www.bel-aerospace-defense.com


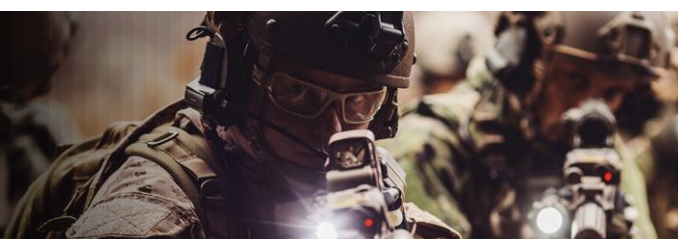
**bel****AEROSPACE
& DEFENSE**Networking
Products

SPECIFICATIONS

ETHERNET PORTS:	24 x 10/100/1000Base-T Copper Ethernet with integrated PHY's & magnetics 2 x 1000Base-X/SGMII interface for direct connection to 2 x 1G Fiber interfaces
NETWORKING:	- Energy efficient Ethernet, IEEE 802.3az - Wire-speed hardware-based 26 ports Gigabit Ethernet Switch – L2 & L3 capabilities. - L3-Static Routing capabilities. 1588V2 PTP with two-step clock. - Multicasting (IGMP Snooping), GARP, GMRP, MLD and GVRP up to 8K groups for both IPv4 and IPv6 - Broadcasting and flooding Control up to 8K Groups 802.1q Tagged based VLAN up to 4K VLAN groups - Bridge Support for VLAN Q-in-Q - Link Aggregation 802.3ad - WEB, CLI, Telnet , SNMP V2/V3 management - QoS Multi-Layer Classifier: 802.1p, EtherType, - VLAN-ID, IPv4/6 DSCP/ToS, and UDP/TCP ports & ranges traffic classification. - DSCP remarking for both IPv4 and IPv6 frames - Multiple ACLs per port for optimal usage of Content Aware Policers - Storm controllers for flooded broadcast, multicast and unicast - Spanning Tree (802.1d), RSTP (802.1w) and multiple Spanning Tree (802.1S) - for fast recovery rings - Up to 4K egress VLAN tag operations
NETWORKING: Quality of Service:	- QoS Multi-Layer Classifier: 802.1p, EtherType, VLAN-ID, IPv4/6 DSCP/ToS, and UDP/TCP ports & ranges traffic classification. - Per port WFQ and Strict Queuing scheduling - DSCP remarking for both IPv4 and IPv6 frames - Ingress policer and ingress shaper per port with 500Kbps granularity - Egress shaper per port with 500Kbps granularity - Full-duplex flow control (IEEE802.3X) and half-duplex backpressure
NETWORKING: Security:	- Security via Radius Authentication 802.1x, Port / MAC access control - Port Security - Per port ingress and egress port mirroring - Mirroring per VLAN - Private VLAN support per VLAN (Isolated and Promiscuous ports) - Advanced ACL through hardware based match patterns - Content Aware Policers for generic MAC, ARP, IPv4, IPv6 protocols - Content Aware Policers actions are permit/deny, police, count - Multiple ACLs per port for optimal usage of Content Aware Policers - Storm controllers for flooded broadcast, multicast and unicast - Secure boot
PERFORMANCE:	253.4 Mpps wire speed forwarding rate 128 Gbps maximum forwarding bandwidth 8K MAC Address
CONNECTORS:	2 Board to board connector : TE P/N: 3-1827231-6 - Per port LED indication (Link/Act, Speed) via serial GPIO and on-board LED array
STANDARDS:	Designed to Meet: MIL-STD-461E MIL-STD-810F When incorporated in a suitable enclosure
POWER:	12VDC (5V – 28VDC) - Power Consumption: 15W Typical

**bel****AEROSPACE
& DEFENSE**

Ask us about our complete line of power and networking products.
sales-aerodef@belf.com • www.bel-aerospace-defense.com


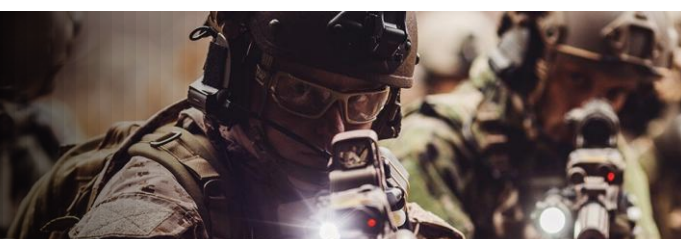
**bel****AEROSPACE
& DEFENSE**Networking
Products

SPECIFICATIONS


PHYSICAL:	• Dimensions: 130mm (L) x 87mm (W) • Dimensions: 5.11" (L) x 3.42" (W) • Weight: 350g • Mounting Holes: 7 x NC 4-40
COOLING:	• No Moving Parts. Passive Cooling
OPERATING TEMP:	• -40°C to +85°C (-40°F to +185°F) Cold Start-Up
STORAGE TEMP:	• -40°C to +85°C (-40°F to +185°F)

**bel****AEROSPACE
& DEFENSE**


Ask us about our complete line of power and networking products.
sales-aerodef@belf.com • www.bel-aerospace-defense.com

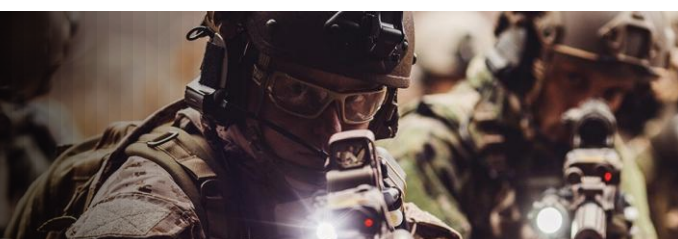


A

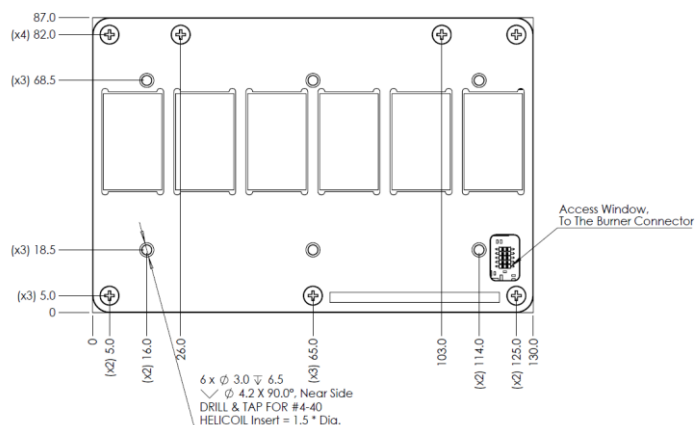


B

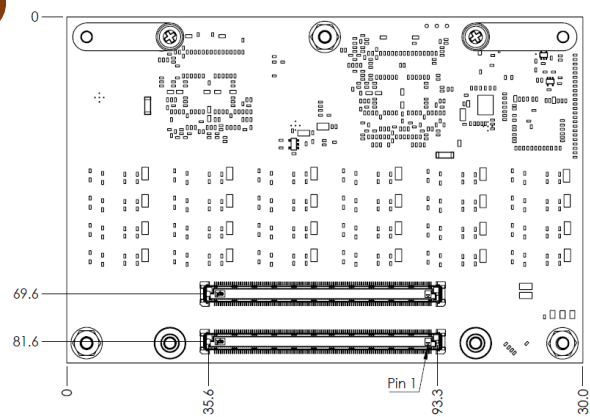

C

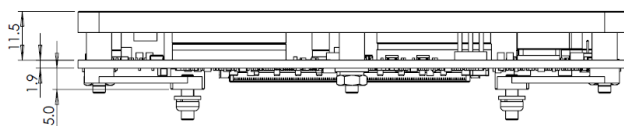

D

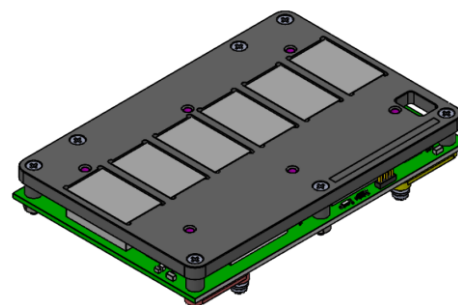

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-9126-000	Board Level Ethernet Managed Switch, 24 x 1G Copper ports + 2 x 1G SGMII interfaces
1-9126-001	Board Level Ethernet Managed Switch, 24 x 1G Copper ports + 2 x 1G SGMII interfaces + Cooling base plate
1-9126EV-000	Evaluation board for MILTECH9126
1-CP-9126-000	Cooling base plate for MILTECH9126

