


M786 SERIES

DC/DC POWER SUPPLY

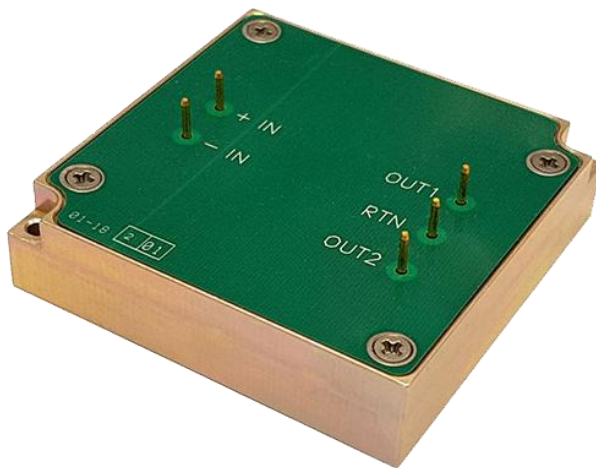

PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- SINGLE/DUAL OUTPUT
- DC/DC POWER SUPPLY
- UP TO 30 W

M786 SERIES DC/DC POWER SUPPLY

APPLICATIONS

Military, Ruggedized, Telecom, Industrial

SPECIAL FEATURES

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Fixed switching frequency (250 KHz)
- EMI/RFI filters included
- Indefinite short circuit protection with auto-recovery
- Input over-voltage shutdown with auto-recovery (optional)
- Over temperature shutdown with auto-recovery

ENVIRONMENTAL

Meets or exceeds MIL-STD-810D

Temperature:

Operating -55°C to $+85^{\circ}\text{C}$ (baseplate)

Storage -55°C to $+125^{\circ}\text{C}$

RELIABILITY

273,000 hours, calculated per
MIL-STD-217F at $+85^{\circ}\text{C}$ baseplate, AUF.

1,200,000 hours, calculated per
MIL-STD-217F at $+85^{\circ}\text{C}$ baseplate, GF.

* Specifications are subject to change without
prior notice by the manufacturer

ELECTRICAL SPECIFICATIONS

DC INPUT

DC input range: 16 to 36 VDC

Input transient protection:

All models meet or exceed (no damage)

MIL-STD-1275A (100V for 50mSec) and

MIL-STD-704A, MIL-STD-704D (80V for 0.1Sec)

(for 600V Spike – a serial resistor is required)

Overvoltage shutdown with auto-recovery (optional)

Efficiency: 75%, Typical

EMI/RFI:

Design to meet or exceed

MIL-STD-461C - CS01, CS02, CE03, RS02 &

RS03, MIL-STD-461D - CE102-16

Isolation:

200V between Input and Output

200V between Input and Case

DC OUTPUT (floating)

Line /load regulation:

Less than $\pm 2\%$ (no load to full load, -55°C to $+85^{\circ}\text{C}$)

Ripple and noise: 50mVp-p, typical (max. 1%)

Current limiting:

Continuous protection for unlimited time.

Over voltage protection:

Passive transzorb on output.

Over temperature protection:

Shutdown at baseplate temperature of $+100^{\circ}\text{C}$ ($\pm 5^{\circ}\text{C}$)

Automatic recovery at baseplate

temperature lower than $+90^{\circ}\text{C}$ ($\pm 5^{\circ}\text{C}$)

Isolation:

200V between Output and Input

200V between Output and Case

M786 SERIES DC/DC POWER SUPPLY

SELECTION GUIDE

Model	Input	Output #1	Output #2
M786-16	16 to 36VDC	5V / 2A	3.3V / 1A
M786-17	16 to 36VDC	5V / 2A	3.3V / 2A
M786-18	18 to 36VDC	5V / 1A	3.3V / 2A
M786-19	16 to 45VDC	5V / 2A	3.3V / 3A
M786-20	18 to 36VDC	15V / 1.6A	15V / 0.4A

PIN ASSIGNMENT

Option 1


Pin No.	Pin Function
1	+ VIN
2	- VIN
3	+ OUT1 1
4	RTN
5	+ OUT 2

MPS can customize this product to your requirements - contact us!

Option 2

Pin No.	Pin Function
1	+ VIN
2	- VIN
3	+ OUT 1
4	RTN
5	- OUT 2

OUTLINE DRAWING

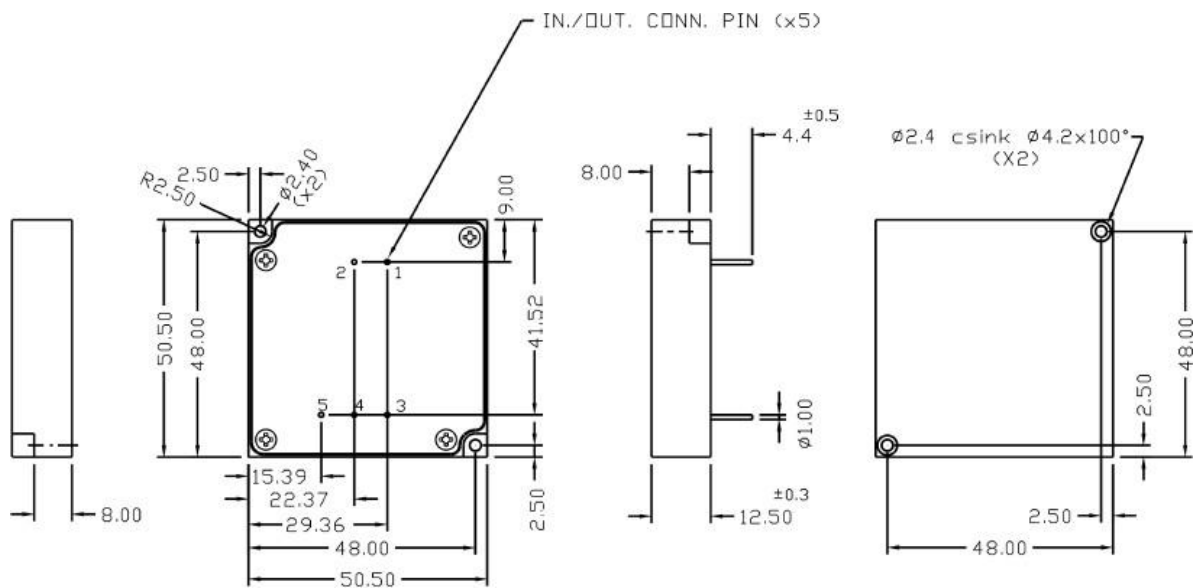

Notes

1. Dimensions are in mm
2. Tolerance is:
.XX ± 0.02 IN
.XXX ± 0.01 IN
3. Weight: Approx. 2 Oz (60 gr.)

*Specifications are subject to change without prior notice by the manufacturer.