


M8149 SERIES

DC/DC POWER SUPPLY

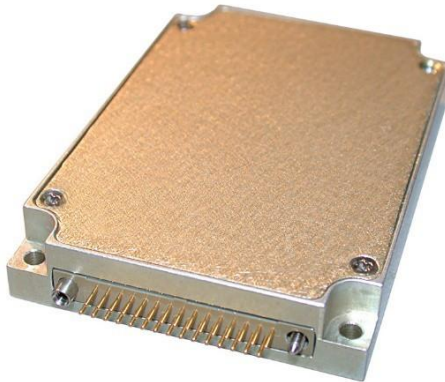

PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- QUAD OUTPUT
- UP TO 60W

M8149 SERIES DC/DC POWER SUPPLY

APPLICATIONS

Military, Ruggedized, Telecom, Industrial

SPECIAL FEATURES

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Fixed switching frequency (250 kHz)
- TTL logic enable
- EMI/RFI filters included
- Indefinite short circuit protection with auto-recovery
- Input over-voltage shutdown with auto-recovery
- Over temperature shutdown with auto-recovery

ENVIRONMENTAL

Meets or exceeds MIL-STD-810D

Temperature:

Operating -55°C to $+85^{\circ}\text{C}$ (baseplate)

Storage -55°C to $+125^{\circ}\text{C}$

RELIABILITY

150,000 hours, calculated per

MIL-STD-217F at $+85^{\circ}\text{C}$ baseplate, ground fixed.

Note: Specifications are subject to change without prior notice by the manufacturer

ELECTRICAL SPECIFICATIONS

DC INPUT

DC Input range: 18 to 48 VDC

Input transient protection:

All modules meet or exceed (no damage)
MIL-STD-1275A (100V for 50 mSec) and
MIL-STD-704A, MIL-STD-704D (80V for 0.1 Sec)

Over-voltage shutdown with auto-recovery

Efficiency: Up to 80%

EMC:

Designed to meet MIL-STD-461F*
CE101, CE102, CS101, CS114, CS115,
CS116, RE101, RE102, RS101, RS103

Isolation:

200V between Input and Output

200V between Input and Case

DC OUTPUT (floating)

Line/Load regulation:

Less than $\pm 2\%$ (no load to full load, -55°C to $+85^{\circ}\text{C}$)

Ripple and Noise: 50mVp-p, typical (max. 1%)

Current limiting:

Continuous protection for unlimited time

Over voltage protection:

Passive tranzorb on output.

Over temperature protection:

Shutdown at baseplate temperature of $+100^{\circ}\text{C}$ ($\pm 5^{\circ}\text{C}$)

Automatic recovery at baseplate
temperature lower than $+90^{\circ}\text{C}$ ($\pm 5^{\circ}\text{C}$)

Isolation:

200V between Output and Input

100V between Output and Case

* EMC compliance achieved when tested with 5 μH LISNs, shielded harness and static resistive load.

Functions and Signals

INHIBIT

The **INHIBIT** signal is used to turn the power supply ON and OFF.
TTL “1” or OPEN – Power supply is ON (For normal operation, leave this pin unconnected.) TTL “0” or SHORT to **SIGNAL RTN** – Power supply is OFF.

SYNC

The **SYNC** signal is used to allow the power supply's switching frequency to sync with the system clock. The external clock's frequency can be $250 \text{ kHz} \pm 10 \text{ kHz}$. When this pin is left open (unconnected) the power supply will synchronize to its internal clock, set at $250 \text{ kHz} \pm 10 \text{ kHz}$.

SIGNAL RTN


The **SIGNAL RTN** is used as a return path for the **SYNC** and **INHIBIT** signals. This pin is referenced to **VIN RTN**.

PIN ASSIGNMENT

M8149 SERIES DC/DC POWER SUPPLY

PIN No.	PIN Function	PIN No.	PIN Function	PIN No.	PIN Function
10, 11, 24, 25, 26	+ VIN	3, 18	- OUT 2	16	SYN IN
7, 8, 9, 22, 23	VIN RTN	12, 27	+ OUT 3	17	SIGNAL RTN
29, 30	+ OUT 1	13, 28	- OUT 3	1	INHIBIT
14, 15	- OUT 1	5, 20	+ OUT 4	2	CHASSIS
4, 19	+ OUT 2	6, 21	- OUT 4		

OUTLINE DRAWING

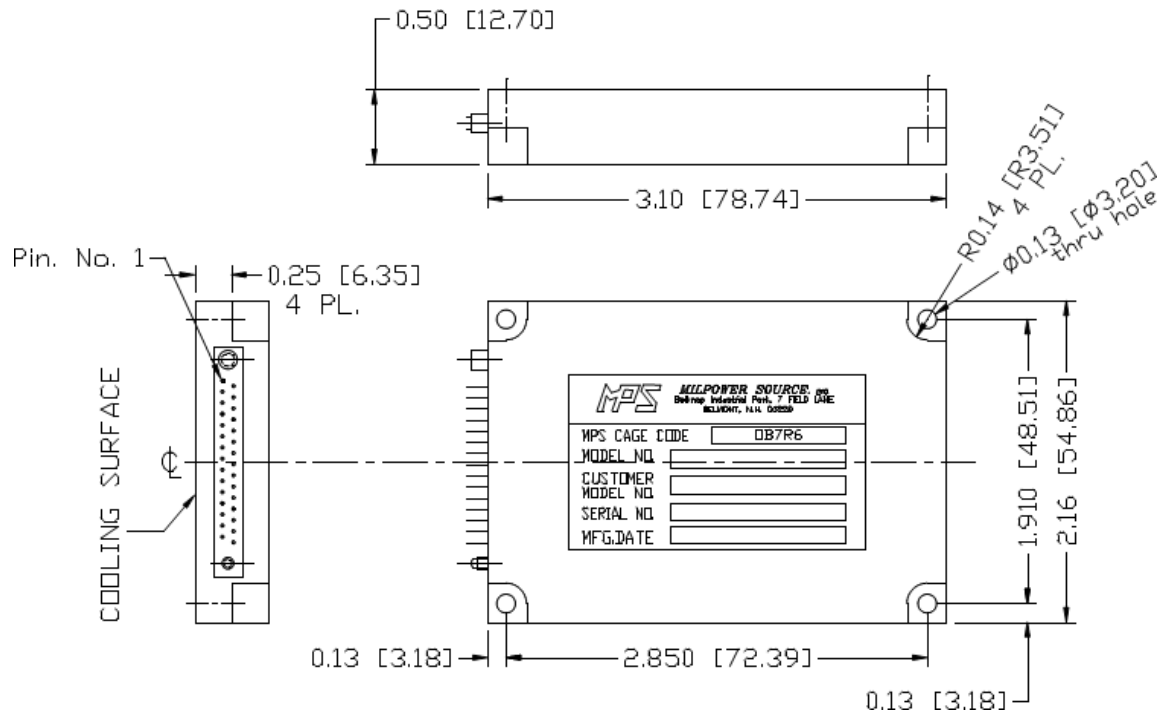

Connector Type: RM272-030-312-2900 or Eq.

Notes

- Dimensions are in Inches [mm]
- Tolerance is:
 .XX ± 0.01 IN
 .XXX ± 0.005 IN
- Weight: Approx. 3.5 oz (100 g.)

Note: Specifications are subject to change without prior notice by the