

M7528 SERIES

SINGLE-OUTPUT, 1000W DC TO DC BASEPLATE COOLED POWER SUPPLY

The M7528 is a series of mechanically robust, base-plate cooled, high performance, power supplies, designed for Airborne (MIL-STD-704), Ground Mobile (MIL-STD-1275) and other Hi-Reliability applications. The M7528 converts MIL-STD-704F and MIL-STD-1275E 28V power, to a well regulated, filtered and protected DC Output.



M7528 Series– DC/DC Power Supply

Standard Models List (for other voltages – consult factory)

| Part Number | Output | | Power | Special features |
|-------------|--------------------|---------|-------|--|
| | Voltage | Current | | |
| M7528-101 | 12 V _{DC} | 50 A | 600W | |
| M7528-102 | 15 V _{DC} | 50 A | 750W | |
| M7528-103 | 24 V _{DC} | 42 A | 1008W | |
| M7528-104 | 28 V _{DC} | 36 A | 1008W | |
| M7528-105 | 48 V _{DC} | 20A | 960W | |
| M7528-106 | 28 V _{DC} | 36A | 1008W | Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$. |
| M7528-107 | 48 V _{DC} | 20A | 960W | Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$. |

- Additional standard configurations available. **Contact factory for more details.**
- All of our products can be configured to comply with EU REACH regulations. **Contact factory for more details.**
- Rides through transients IAW MIL-STD-1275E and MIL-STD-704F.

THE MAIN FEATURES OF THE M7528 ARE:

- DC/DC Single outputs power supply up to 1000W
- Standard Input version IAW MIL-STD-704F
- Standard Input version IAW MIL-STD-1275E
- Rides through transients IAW MIL-STD-1275E and MIL-STD-704F
- High efficiency – up to 88% (depending on output voltage).
- Full galvanic isolation between Input, Chassis and Outputs
- External Inhibit (On/Off)
- Fixed switching freq. (250 kHz)
- EMI filters included
- Remote sense compensation
- Indefinite short circuit protection with auto-recovery
- Over-voltage protection
- Over temperature shutdown with auto-recovery
- High density
- Conduction cooled via the baseplate

SPECIFICATIONS:

| | | |
|----------------------|--------------------------------------|--|
| DC Input | <i>Voltage Range</i> | 28VDC input IAW MIL-STD-704F and MIL-STD-1275E |
| | <i>Transients</i> | Rides through transients IAW MIL-STD-1275E and MIL-STD-704F: 12V, 1sec 16V, 30sec 18V Continuous 50V Continuous 100V, 50msec |
| | <i>Isolation</i> | Input to Output: 200 VDC Input to Case: 200 VDC |
| | <i>Input Reverse Polarity</i> | Protection for unlimited time |
| | <i>Under-Voltage Lock-Out</i> | Unit shuts down when input voltage falls below 10.5VDC ±1VDC Please consult factory for more details. |
| | <i>Over-Voltage Lock-Out</i> | Unit shuts down when input voltage rises above 104V _{DC} ±2V _{DC} Please consult factory for more details. |
| DC Output | <i>Rating</i> | See table on page 8 |
| | <i>Voltage Regulation</i> | Better than or equal to ±1% (low to high line voltage, no load to full load, –55 °C to +85 °C at baseplate). |
| | <i>Remote Sense</i> | <u>Description:</u> Used to achieve accurate voltage regulation at load terminals, to compensate for voltage drop across the leads connecting the converter to the load, 0.25 V ± 0.1 V <u>Use:</u> Connect SENSE line directly to the load's positive terminal, and SENSE RTN directly to the load's negative terminal. If not used, connect SENSE to OUTPUT and SENSE RTN to OUTPUT RTN. Do not leave open! |
| | <i>Ripple</i> | Less than 50mV _{p-p} , typical (max. 1%) without external capacitance. When connected to system capacitance ripple drops significantly. |
| | <i>Isolation</i> | Output to Case: 100 VDC |

W7928 Series– DC/DC Power Supply

| | | |
|--|--|--|
| | <p>Overvoltage Protection</p> | <ul style="list-style-type: none"> • Active Over-Voltage Protection: The secondary control circuit takes the over if output voltage exceeds 110% ± 5% of nominal voltage. Beyond this, output voltage clamps. • Passive Over-Voltage Protection: Zener diode installed on output terminals, selected at 120% ± 10% of nominal voltage. |
| | <p>Efficiency</p> | <p>For 18 to 48Vdc input with 28V/36A output: 88-89% typical For 12-100Vdc input with 28V/36A output: 85% typical</p> |
| | <p>Current Limit & Overload</p> | <p>Output voltage turns off and on periodically with low duty cycle (hiccup) to protect system conductors and converter from short circuit</p> |
| | <p>Over Temp. Protection</p> | <p>Output shuts down if base plate temperature exceeds +105°C ± 5°C. Automatic recovery when baseplate temperature returns to below +95°C ± 5°C.</p> |


Specifications (Cont.):

| | | |
|--|--------------------------------|---|
| Control & Indication | <i>INHIBIT Signal</i> | <p><u>Description:</u> Inhibits output. <u>Use:</u> Apply short circuit or TTL "LOW" to turn off the power supply. Leave open or apply TTL "HIGH" to turn on the power supply. <u>Referenced to:</u> SIGNAL RTN</p> |
| | <i>SYNC</i> | <p><u>Description:</u> Synchronizes internal switching frequency to system clock. <u>Use:</u> Apply TTL level, 250 kHz ± 10 kHz, 50% duty-cycle clock. Leave open if unused. In this case, the switching frequency will be set by the internal clock (250 kHz) <u>Referenced to:</u> SIGNAL RTN</p> |
| | <i>SIGNAL RTN</i> | <p><u>Description:</u> Signals return reference. <u>Referenced to:</u> Connected by a 100 Ω resistor to INPUT RTN</p> |
| | <i>POR Optional</i> | <p><u>Description:</u> The POR signal disables the input under voltage lockout, input over voltage lockout, over temperature protection and peak load duration limiter. Please consult factory for details.</p> |
| Environment Designed to meet MIL-STD-810F | <i>Temperature</i> | <p>Methods 501.4 & 502.4 Operating: –55 °C to +85 °C (at baseplate) Storage: –55 °C to +125 °C (ambient)</p> |
| | <i>Humidity</i> | <p>Method 507.4 Up to 95% RH</p> |
| | <i>Salt-fog</i> | <p>Method 509.4</p> |
| | <i>Altitude</i> | <p>Method 500.4 Procedures I – Storage/Air transport: up to 70,000 ft. (non-operational) Procedure II – Operation/Air Carriage: up to 70,000 ft. (operational)</p> |
| | <i>Mechanical Shock</i> | <p>Method 516.5 Procedure I 30 g / 11 ms terminal peak saw-tooth</p> |
| | <i>Vibration</i> | <p>Method 514.5 Category 4 - General minimum integrity exposure IAW Figure 514.5C-17 1 hour per axis.</p> |
| | <i>Fungus</i> | <p>Does not support fungus growth, in accordance with the guidelines of MIL-STD-454, Requirement 4-</p> |

M7528 Series - DC/DC Power Supply


| | | |
|------------------------------------|--|---|
| <p>EMI</p> | <p><i>MIL-STD-461F</i></p> | <p>Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103 *EMI Compliance achieved with 5µH LISN, shielded harness and static resistive load.</p> |
| <p>Reliability</p> | <p>150,000 hours, calculated per MIL-HDBK-217F Notice 2 at +85 °C baseplate, Ground Fix conditions.</p> | |
| <p>Cooling Requirements</p> | <p>The M7528 is a baseplate cooled unit. The base of the M7528 should be thermally attached to a suitable heatsink that maintains it below +85 °C.</p> | |
| <p>Form factor</p> | <p>4.76" wide, 1.29" high and 6.40" deep. For detailed dimensions and tolerances see Drawing: TBD.</p> | |
| <p>Weight</p> | <p>Approx. 1100 g.</p> | |
| <p>Connectors</p> | <p>Input connector - J1 Connector type: M24308/24-40F or eq Mates with: M24308/2-4F or eq.</p> <p>Output connector – J2 Connector type: M24308/23-39F or eq Mates with: M24308/4-3F or eq.</p> | |

Vin 28V

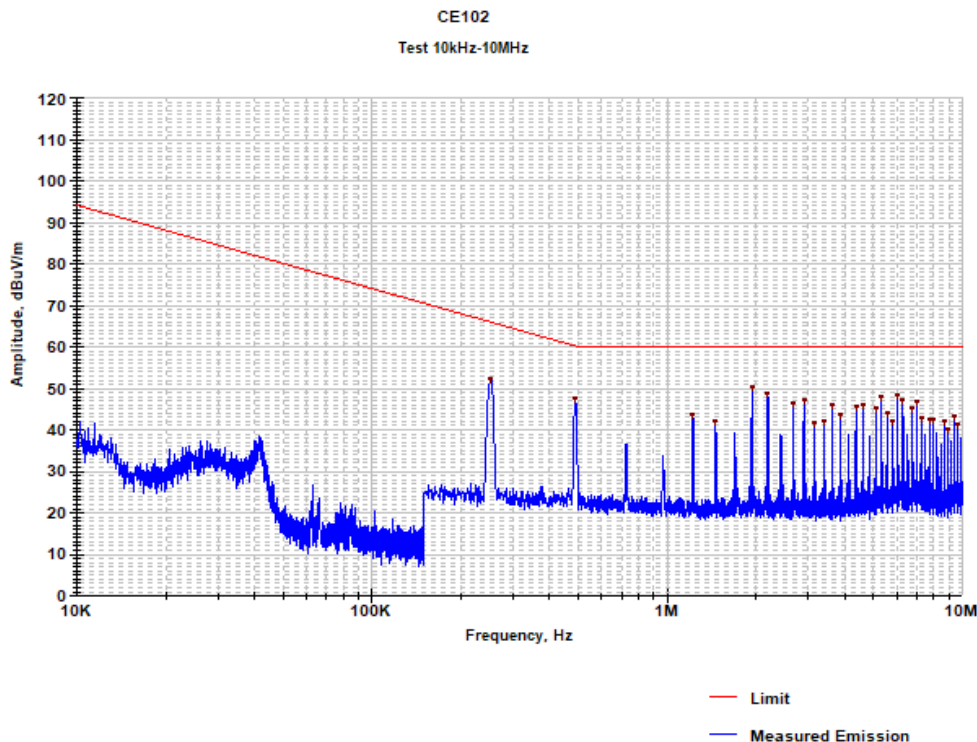


| Frequency (MHz) | Measured Emission (dBuV/m) | Limit (dBuV/m) | Delta (dB) |
|-----------------|----------------------------|----------------|------------|
| 1.938 | 50.1 | 60.0 | -9.9 |
| 2.191 | 48.7 | 60.0 | -11.3 |
| 5.323 | 48.0 | 60.0 | -12.0 |
| 6.041 | 48.2 | 60.0 | -11.8 |

Vin 28V RTN

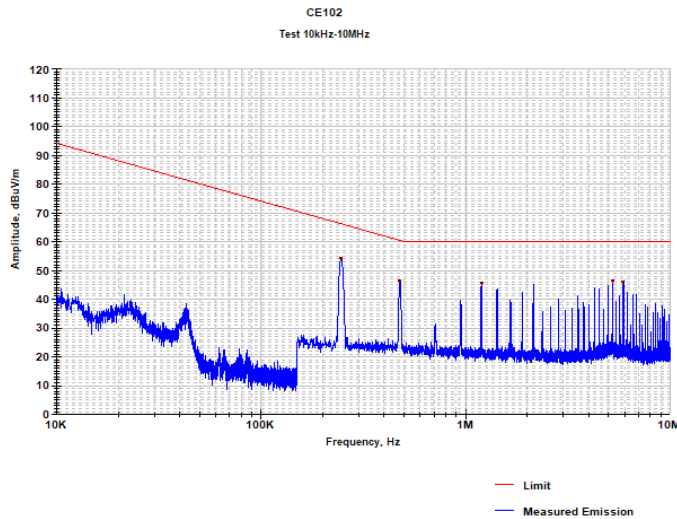

| Frequency (MHz) | Measured Emission (dBuV/m) | Limit (dBuV/m) | Delta (dB) |
|-----------------|----------------------------|----------------|------------|
| 0.247 | 54.0 | 66.1 | -12.2 |
| 0.477 | 46.2 | 60.4 | -14.2 |
| 1.195 | 45.3 | 60.0 | -14.7 |
| 5.207 | 46.3 | 60.0 | -13.7 |
| 5.904 | 45.9 | 60.0 | -14.1 |

RE 102
2-30 MHz
TEST

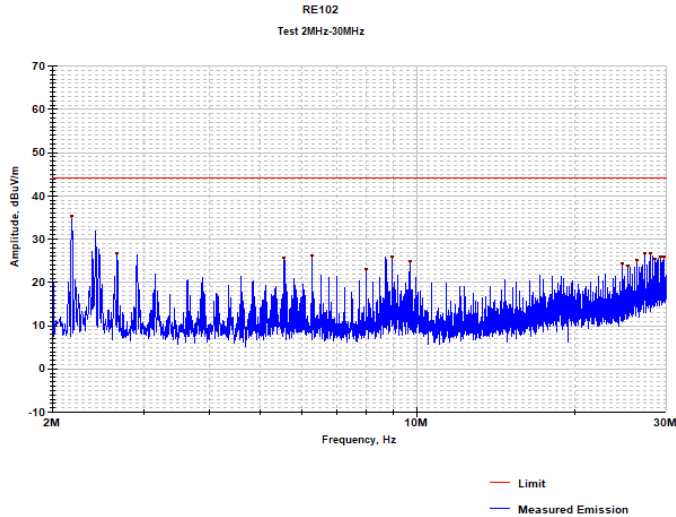


| Frequency (MHz) | Measured Emission (dBuV/m) | Limit (dBuV/m) | Delta (dB) |
|-----------------|----------------------------|----------------|------------|
| 2.179 | 35.2 | 44.0 | -8.8 |
| 2.661 | 26.5 | 44.0 | -17.5 |
| 5.562 | 25.6 | 44.0 | -18.4 |
| 6.290 | 26.1 | 44.0 | -17.9 |
| 7.981 | 23.1 | 44.0 | -20.9 |
| 8.944 | 25.8 | 44.0 | -18.2 |
| 9.672 | 24.8 | 44.0 | -19.2 |
| 24.652 | 24.3 | 44.0 | -19.7 |
| 25.374 | 23.6 | 44.0 | -20.4 |
| 26.343 | 24.9 | 44.0 | -19.1 |
| 27.306 | 26.5 | 44.0 | -17.5 |
| 28.034 | 26.7 | 44.0 | -17.3 |
| 28.516 | 25.4 | 44.0 | -18.6 |

| | | | | |
|---------------|-------------|-------------|--------------|---|
| 29.238 | 25.7 | 44.0 | -18.3 | M7528 Series– DC/DC Power Supply |
| 29.720 | 25.8 | 44.0 | -18.2 | |


30-200MHz

Test horizontal

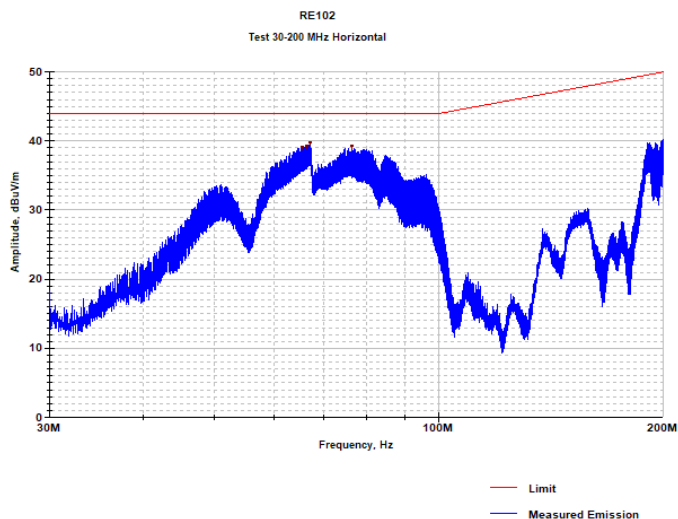

| Frequency (MHz) | Measured Emission (dBuV/m) | Limit (dBuV/m) | Delta (dB) |
|-----------------|----------------------------|----------------|------------|
| 65.462 | 39.1 | 44.0 | -4.9 |
| 66.414 | 39.3 | 44.0 | -4.7 |
| 67.128 | 39.7 | 44.0 | -4.3 |
| 76.291 | 39.3 | 44.0 | -4.7 |


Test vertical

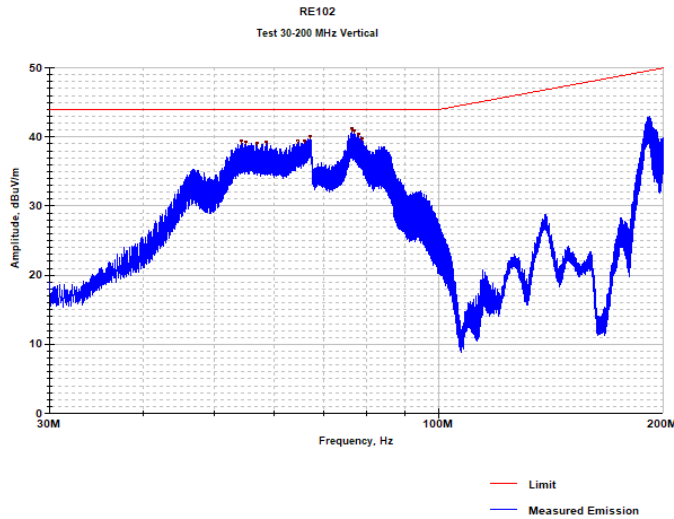

| Frequency (MHz) | Measured Emission (dBuV/m) | Limit (dBuV/m) | Delta (dB) |
|-----------------|----------------------------|----------------|------------|
| 65.462 | 39.1 | 44.0 | -4.9 |
| 66.414 | 39.3 | 44.0 | -4.7 |
| 67.128 | 39.7 | 44.0 | -4.3 |
| 76.291 | 39.3 | 44.0 | -4.7 |


200MHz-1000MHz

Test horizontal

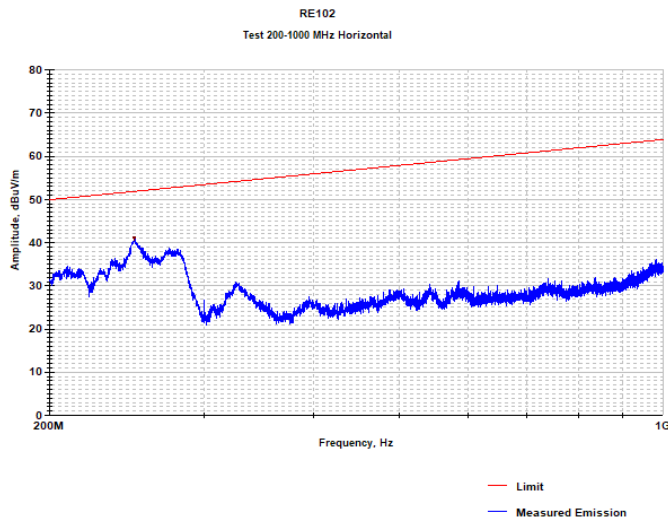

| Frequency (MHz) | Measured Emission (dBuV/m) | Limit (dBuV/m) | Delta (dB) |
|-----------------|----------------------------|----------------|------------|
| 249.760 | 41.13 | 51.93 | -10.80 |


Test vertical

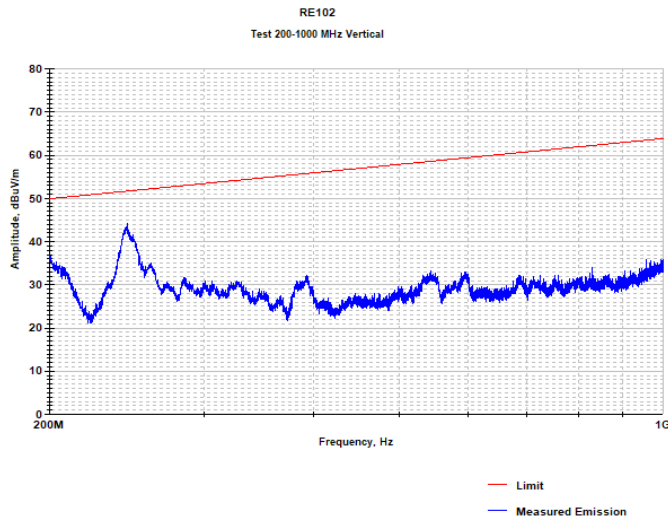


| Frequency (MHz) | Measured Emission (dBuV/m) | Limit (dBuV/m) | Delta (dB) |
|-----------------|----------------------------|----------------|------------|
| 245.280 | 44.07 | 51.78 | -7.71 |

1000MHz-18GHz

Test horizontal

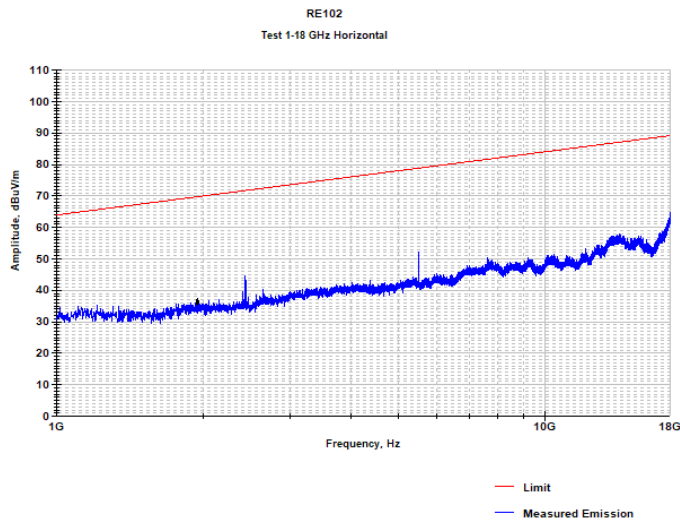

Test vertical

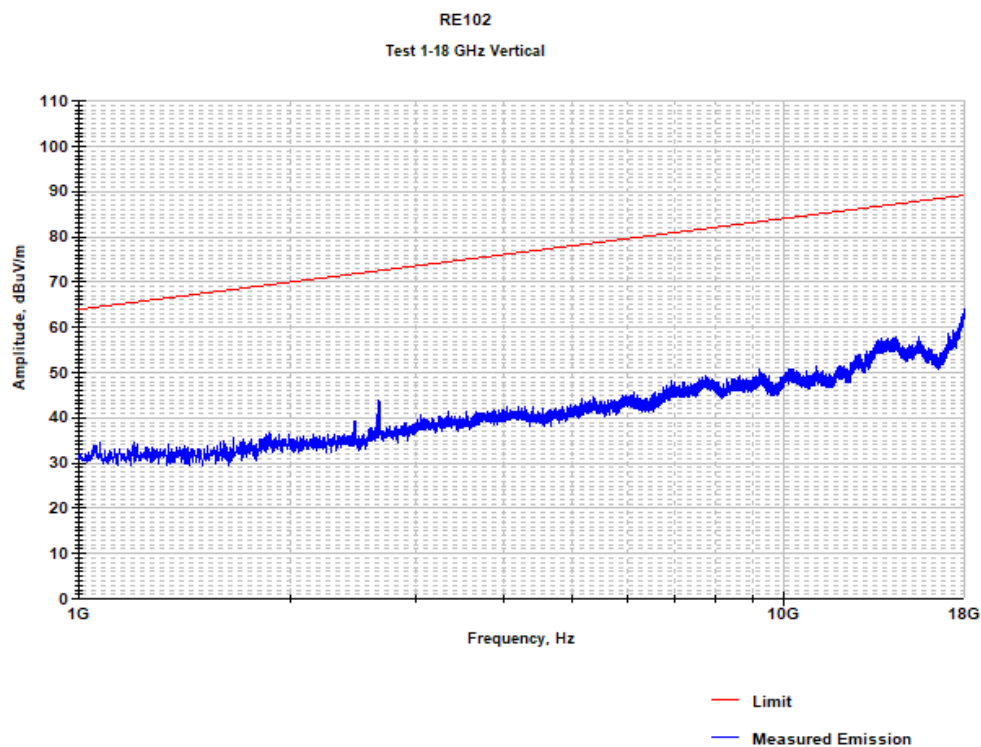

Efficiency Test for M7528 for 704 Input to 28V Output Version

Temp=+25°

| $V_{IN}=18Vdc$ | η (%) |
|----------------|------------|
| Pout (w) | |
| 600 | 88.25 |
| 800 | 87.46 |
| 1080 | 86.68 |

| $V_{IN}=22Vdc$ | η (%) |
|----------------|------------|
| Pout (w) | |
| 600 | 89.37 |
| 800 | 89.11 |
| 1080 | 88.34 |

| $V_{IN}=28Vdc$ | η (%) |
|----------------|------------|
| Pout (w) | |
| 600 | 89.61 |
| 800 | 89.52 |
| 1080 | 89.39 |

| $V_{IN}=40Vdc$ | η (%) |
|----------------|------------|
| Pout (w) | |
| 600 | 89.14 |
| 800 | 89.43 |
| 1080 | 89.07 |

M7528 Series– DC/DC Power Supply

Temp=-55°

| $V_{IN}=18Vdc$ Pout (w) | η (%) |
|----------------------------|------------|
| 600 | 88.98 |
| 800 | 88.73 |
| 1080 | 87.81 |

| $V_{IN}=22Vdc$ Pout (w) | η (%) |
|----------------------------|------------|
| 600 | 89.63 |
| 800 | 89.57 |
| 1080 | 89.01 |

| $V_{IN}=28Vdc$ Pout (w) | η (%) |
|----------------------------|------------|
| 600 | 89.72 |
| 800 | 89.10 |
| 1080 | 89.46 |

| $V_{IN}=40Vdc$ Pout (w) | η (%) |
|----------------------------|------------|
| 600 | 88.96 |
| 800 | 89.37 |
| 1080 | 89.25 |

M7528 Series– DC/DC Power Supply

Temp=+85°


| $V_{IN}=18Vdc$ Pout (w) | η (%) |
|----------------------------|------------|
| 600 | 87.20 |
| 800 | 86.31 |
| 1080 | 85.03 |

| $V_{IN}=22Vdc$ Pout (w) | η (%) |
|----------------------------|------------|
| 600 | 88.71 |
| 800 | 88.60 |
| 1080 | 87.73 |


| $V_{IN}=28Vdc$ Pout (w) | η (%) |
|----------------------------|------------|
| 600 | 89.32 |
| 800 | 89.36 |
| 1080 | 88.84 |

| $V_{IN}=40Vdc$ Pout (w) | η (%) |
|----------------------------|------------|
| 600 | 88.07 |
| 800 | 88.47 |
| 1080 | 88.25 |

TYPICAL CONNECTION DIAGRAM

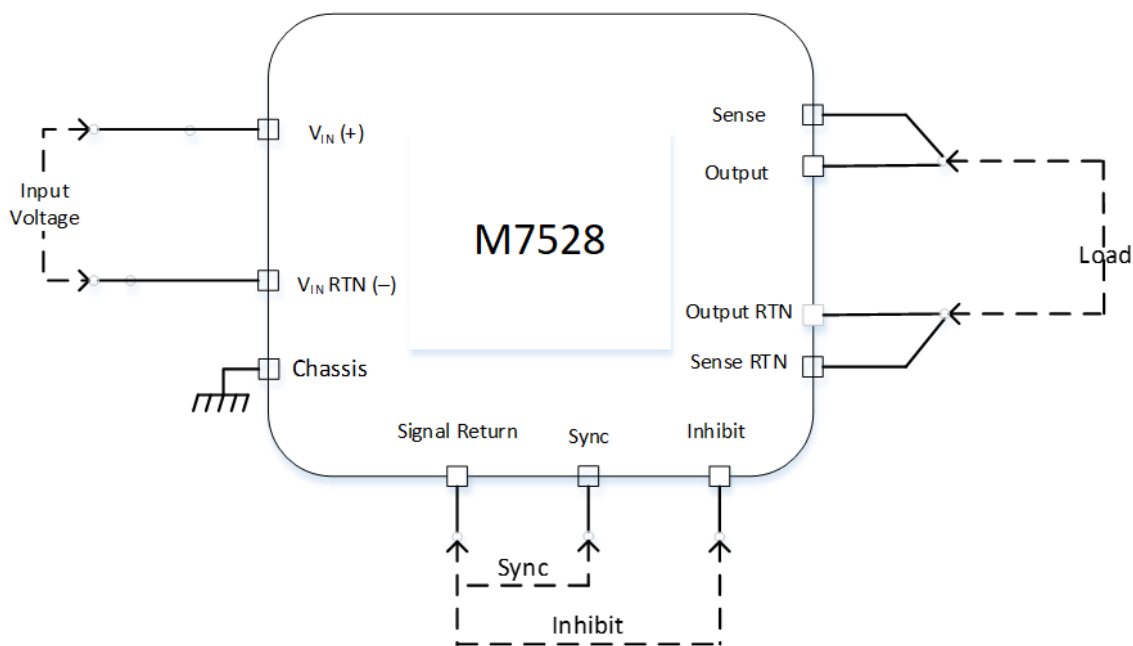

PARALLEL CONNECTION DIAGRAM

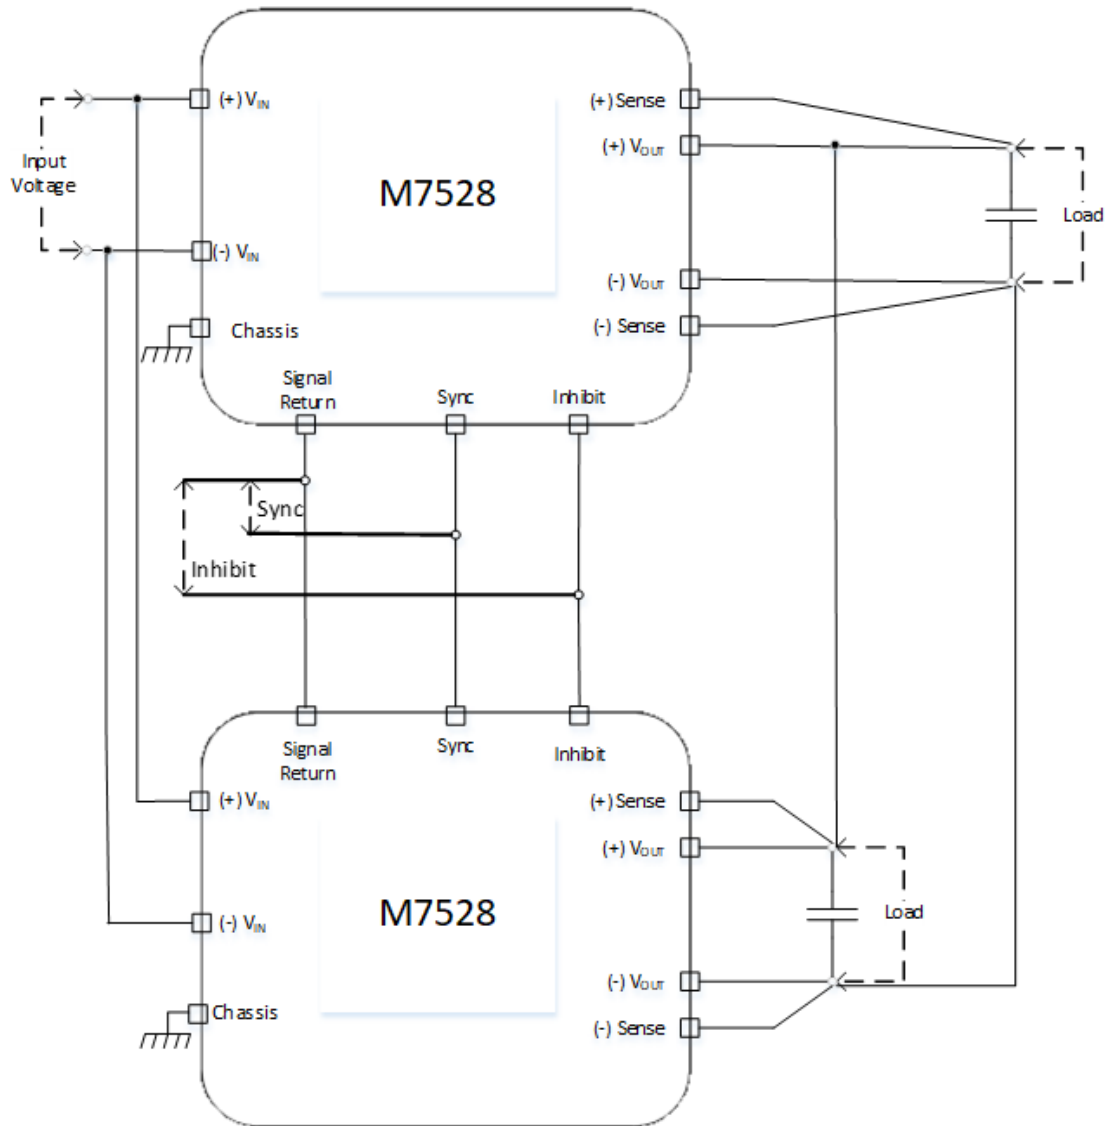

Note: Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$.

PIN ASSIGNMENT:

Input connector - J1 Connector type: M24308/24-40F or eq

Mates with: M24308/2-4F or eq.

| Pin No. | Function | P | Pin No. | Function | P | Pin No. | Function | P |
|---------|-----------|---|---------|-----------|---|---------|------------|---|
| 1 | INPUT | + | 14 | INPUT RTN | - | 27 | INPUT | + |
| 2 | INPUT | + | 15 | INPUT RTN | - | 28 | INPUT RTN | - |
| 3 | INPUT | + | 16 | INPUT RTN | - | 29 | INPUT RTN | - |
| 4 | INPUT | + | 17 | N.C. | | 30 | INPUT RTN | - |
| 5 | INPUT | + | 18 | INHIBIT | + | 31 | INPUT RTN | - |
| 6 | INPUT | + | 19 | SYNC | + | 32 | INPUT RTN | - |
| 7 | INPUT | + | 20 | INPUT | + | 33 | INPUT RTN | - |
| 8 | INPUT | + | 21 | INPUT | + | 34 | INPUT RTN | - |
| 9 | INPUT RTN | - | 22 | INPUT | + | 35 | INPUT RTN | - |
| 10 | INPUT RTN | - | 23 | INPUT | + | 36 | CHASSIS | |
| 11 | INPUT RTN | - | 24 | INPUT | + | 37 | SIGNAL RTN | - |
| 12 | INPUT RTN | - | 25 | INPUT | + | | | |
| 13 | INPUT RTN | - | 26 | INPUT | + | | | |

Output connector – J2 Connector type: M24308/23-39F or eq.

Mates with: M24308/4-3F or eq.


| Pin No. | Function | P | Pin No. | Function | P | Pin No. | Function | P |
|---------|------------|---|---------|------------|---|---------|------------|---|
| 1 | SENSE | + | 10 | OUTPUT RTN | - | 19 | OUTPUT | + |
| 2 | OUTPUT | + | 11 | OUTPUT RTN | - | 20 | OUTPUT RTN | - |
| 3 | OUTPUT | + | 12 | OUTPUT RTN | - | 21 | OUTPUT RTN | - |
| 4 | OUTPUT | + | 13 | SENSE RTN | - | 22 | OUTPUT RTN | - |
| 5 | OUTPUT | + | 14 | OUTPUT | + | 23 | OUTPUT RTN | - |
| 6 | OUTPUT | + | 15 | OUTPUT | + | 24 | OUTPUT RTN | - |
| 7 | N.C. | | 16 | OUTPUT | + | 25 | OUTPUT RTN | - |
| 8 | OUTPUT RTN | - | 17 | OUTPUT | + | | | |
| 9 | OUTPUT RTN | - | 18 | OUTPUT | + | | | |

Note: All pins with identical function/designation should be connected together for optimal performance.

M7528 Series– DC/DC Power Supply

OUTLINE DRAWING:

For detailed dimensions and tolerances see Drawing: M7528001

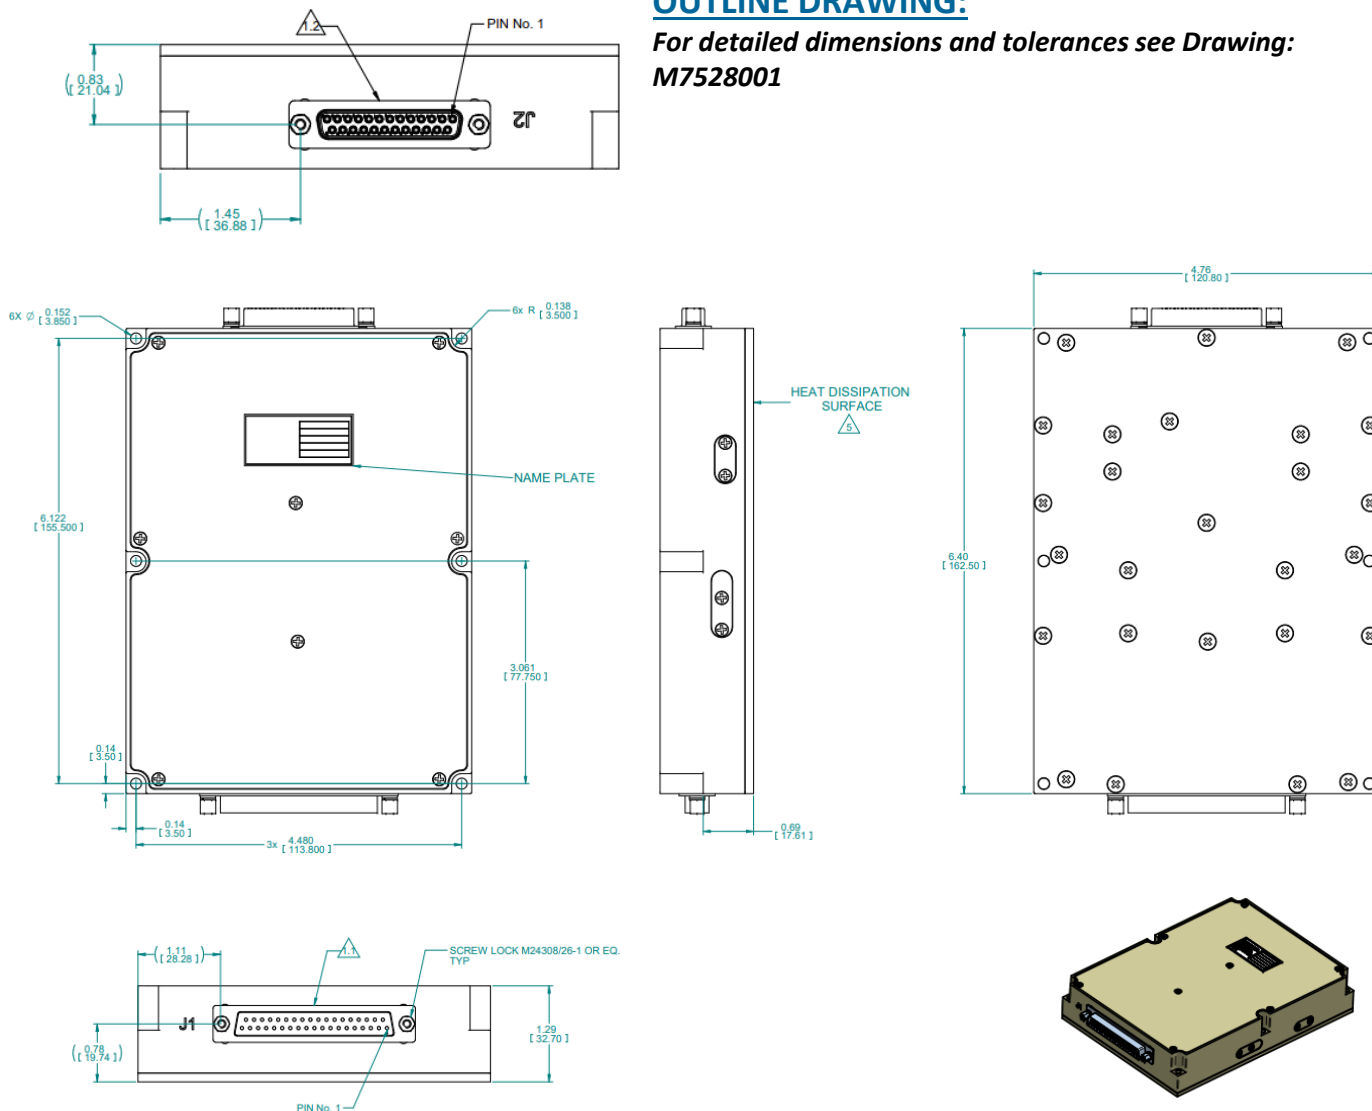

NOTES :

- CONNECTORS:
 - INPUT PLUG D-TYPE CONN. 37P, P/N: M24308/24-40F OR EQ.
 - OUTPUT SOCKET D-TYPE CONN. 25P, P/N: M24308/23-39F OR EQ.
- WORKMANSHIP SHALL BE MIL-STD-454, REQ.T. 9
- MTL. AL 6061-T651& AL 5052-H32
- CHROMATE CONVERSION COATING PER MIL -DTL-5541F, TYPE 1 CLASS 1A
- HEAT DISSIPATION SURFACE: 30.43 in² [19,630 mm²]
- ENGRAVING:
 - CHARACTERS HEIGHT: 0.157in [4mm] DEPTH: 0.157in [4mm].
 - FILL ENGRAVING WITH BLACK LUSTERLESS
 - EPOXY PAINT COLOR PER FED-STD 595 N0 : 37038.

DIMENSIONS ARE IN INCH [MM]
DO NOT SCALE DRAWING

GENERAL TOLERANCES
X.XX ± .02 [0.50]
X.XXX ± .006 [0.15]
ANGLES ± 1°

Note: Specifications are subject to change without prior notice by the manufacturer.