

## MILTECH™ 9126


Military Grade Embedded Ethernet Switch - 24 x 10/100/1000TX Ports  
+ 2 x Gigabit Fiber Ports

The MILTECH 9126 is specifically designed for complex traffic applications featuring IEEE-1588 capabilities suitable for rugged military mobile tactical platforms, which require network-centric interfaces.

With 24 triple-speed (10/100/1000Mbps) ports + 2 Interfaces SGMII. MILTECH 9126 features both L2/ L3 network switching and static routing capabilities, including virtual LANS (VLANs), traffic prioritization/ QoS, IPv4/IPv6 support, and bandwidth aggregation. It supports all the latest networking protocols for redundancy, security, multicast, and management.

With the industry's smallest footprint, the MILTECH 9126 measures only 130x87 mm to offer performance and a combination of size, weight, and power (SWaP) in the industry, saving valuable real estate for devices that make mobile platforms highly effective.

Conformally coated and with board-to-board connectors, it can easily be integrated as a module-based network building block in any military-grade communications platform. The MILTECH 9126 board level communication solution will withstand working temperatures of -45°C to +85°C and will comply with MIL STD-810 & MILSTD461 (when incorporated in a suitable enclosure).

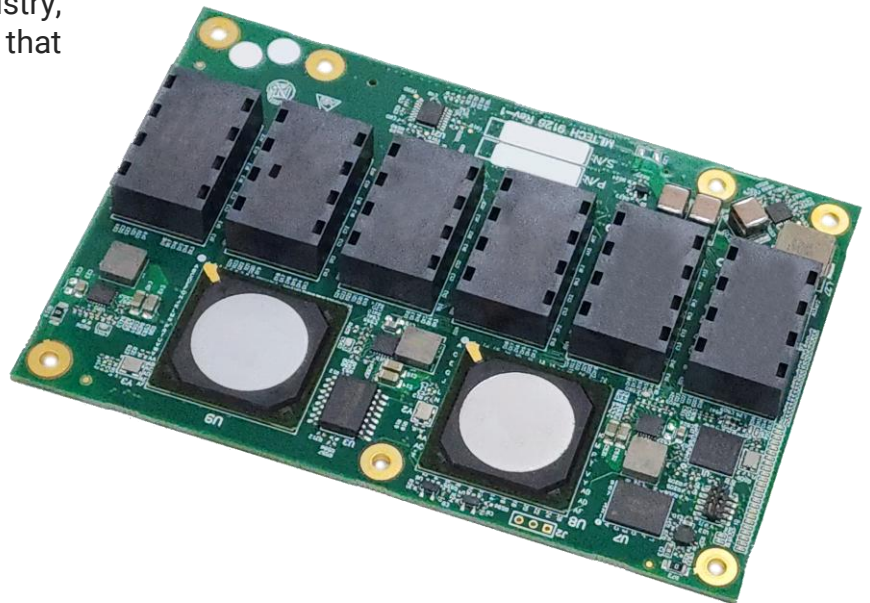



## SPECIFICATIONS

ETHERNET PORTS:	<ul style="list-style-type: none"> <li>• 24 Gigabit Copper Ethernet with integrated PHY's &amp; magnetics.</li> <li>• 2 x SGMII interface for direct connection to 2 x 1G Fiber interfaces.</li> </ul>
NETWORKING:	<ul style="list-style-type: none"> <li>• Energy efficient Ethernet, IEEE 802.3az</li> <li>• Wire-speed hardware-based 26 ports Gigabit Ethernet Switch – L2 &amp; L3 capabilities.</li> <li>• L3-Static Routing capabilities.</li> <li>• 1588V2 PTP with two-step clock.</li> <li>• Multicasting (IGMP Snooping), GARP, GMRP, MLD and GVRP up to 8K groups for both IPv4 and IPv6</li> <li>• Broadcasting and flooding Control up to 8K Groups</li> <li>• 802.1q Tagged based VLAN up to 4K VLAN groups</li> <li>• Bridge Support for VLAN Q-in-Q</li> <li>• Link Aggregation 802.3ad</li> <li>• WEB, CLI, Telnet , SNMP V2/V3 management</li> <li>• QoS Multi-Layer Classifier: 802.1p, EtherType,</li> <li>• VLAN-ID, IPv4/6 DSCP/ToS, and UDP/TCP ports &amp; ranges traffic classification.</li> <li>• DSCP remarking for both IPv4 and IPv6 frames</li> <li>• Multiple ACLs per port for optimal usage of Content Aware Policers</li> <li>• Storm controllers for flooded broadcast, multicast and unicast</li> <li>• Spanning Tree (802.1d), RSTP (802.1w) and multiple Spanning Tree (802.1S)</li> <li>• for fast recovery rings</li> <li>• Up to 4K egress VLAN tag operations</li> </ul>
NETWORKING: Quality of Service:	<ul style="list-style-type: none"> <li>• QoS Multi-Layer Classifier: 802.1p, EtherType, VLAN-ID, IPv4/6 DSCP/ToS, and UDP/TCP ports &amp; ranges traffic classification.</li> <li>• Per port WFQ and Strict Queuing scheduling</li> <li>• DSCP remarking for both IPv4 and IPv6 frames</li> <li>• Ingress policer and ingress shaper per port with 500Kbps granularity</li> <li>• Egress shaper per port with 500Kbps granularity</li> <li>• Full-duplex flow control (IEEE802.3X) and half-duplex backpressure</li> </ul>
NETWORKING: Security:	<ul style="list-style-type: none"> <li>• Security via Radius Authentication 802.1x, Port / MAC access control</li> <li>• Port Security</li> <li>• Per port ingress and egress port mirroring</li> <li>• Mirroring per VLAN</li> <li>• Private VLAN support per VLAN (Isolated and Promiscuous ports)</li> <li>• Advanced ACL through hardware based match patterns</li> <li>• Content Aware Policers for generic MAC, ARP, IPv4, IPv6 protocols</li> <li>• Content Aware Policers actions are permit/deny, police, count</li> <li>• Multiple ACLs per port for optimal usage of Content Aware Policers</li> <li>• Storm controllers for flooded broadcast, multicast and unicast</li> <li>• Secure boot.</li> </ul>
CONNECTORS:	<ul style="list-style-type: none"> <li>• 2 Board to board connector : TE P/N: 3-1827231-6</li> <li>• Per port LED indication (Link/Act, Speed) via serial GPIO</li> </ul>
STANDARDS:	<ul style="list-style-type: none"> <li>• MIL-STD-461E   MIL-STD-810F GM   IP67. When incorporated in a suitable enclosure</li> </ul>
PERFORMANCE:	<ul style="list-style-type: none"> <li>• 253.4 Mpps wire speed forwarding rate</li> <li>• 128 Gbps maximum forwarding bandwidth</li> <li>• 8K MAC Address</li> </ul>
POWER:	<ul style="list-style-type: none"> <li>• 12VDC (5Vdc – 28Vdc)</li> <li>• Power Consumption: 15W Typical</li> </ul>







## SPECIFICATIONS

ELECTROMAGNETIC:	<ul style="list-style-type: none"><li>• MIL-STD-461E Electromagnetic compatibility</li><li>• CE-102, CS-114, CS-115, CS-116, RE-102, RS-103 When incorporated in a suitable enclosure</li></ul>
SHOCK/VIBRATION/HUMIDITY:	<ul style="list-style-type: none"><li>• MIL-STD-810F; 501.4I   501.4II   502.4I   502.4II   507.4   500.4II   514   516I   516VI   514.5   512.4 When incorporated in a suitable enclosure</li></ul>
PHYSICAL:	<ul style="list-style-type: none"><li>• Dimensions: 130mm (L) x 87mm (W)</li><li>• Dimensions: 5.11" (L) x 3.42" (W)</li><li>• Weight: 350g</li><li>• Mounting Holes: 7 x NC 4-40</li></ul>
COOLING:	<ul style="list-style-type: none"><li>• No Moving Parts. Passive Cooling.</li></ul>
OPERATING TEMP:	<ul style="list-style-type: none"><li>• -45°C to +85°C (-49°F to +185°F) Cold Start-Up</li></ul>
STORAGE TEMP:	<ul style="list-style-type: none"><li>• -45°C to +85°C (-49°F to +185°F)</li></ul>







**A**

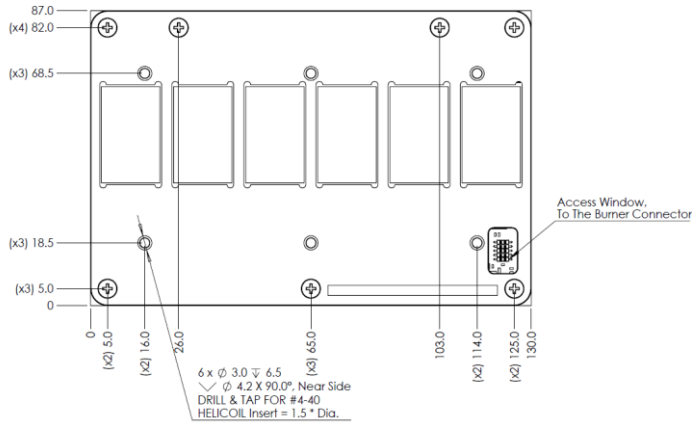


**B**

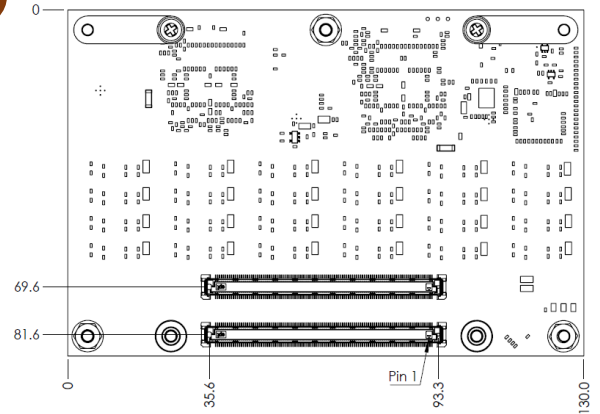

**C**

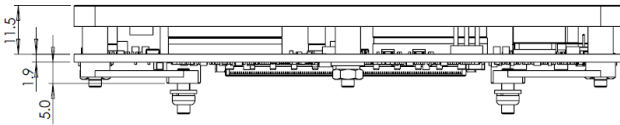

**D**

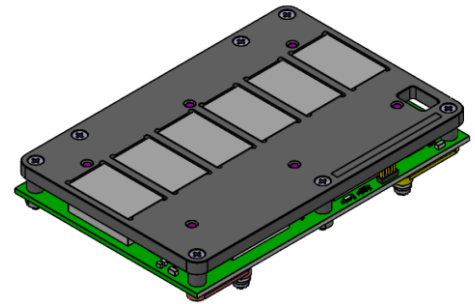

## ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-9126-000	Board Level Ethernet Managed Switch, 24 x 1G Copper ports + 2 x 1G SGMII interfaces
1-9126EV-000	Evaluation board for MILTECH9126
1-CP-9126-000	Cooling base plate for MILTECH9126
1-ICE9126-000	Hardened Managed Switch, 24 x 1G Copper ports + 2 x 1G SGMII interfaces

